

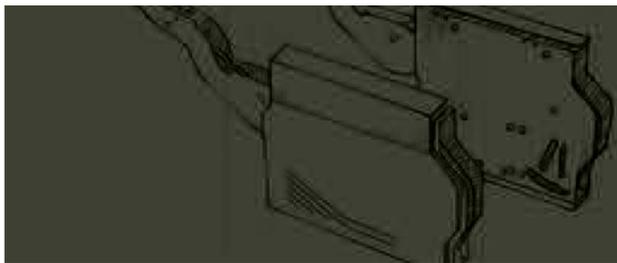
REYON

TABLE OF CONTENTS

PICTOGRAMS

滑轨 SLIDE		
	●	BALL BEARING SLIDE 001-009
	●	ROLLER SLIDE 010-011
	●	STEEL DRAWER SLIDE 012-017
	●	UNDERMOUNT SLIDE 018-021
	●	FURNITURE TURNTABLE 022-022

铰链 HINGE		
	●	35MM CUP CONCEALED HINGE 025-050
	●	26/40MM CUP CONCEALED HINGE 051-052
	●	HINGE FOR GLASS DOOR / ALUMINIUM FRAME 040-043
	●	AMERICAN CONCEALED HINGE 044-044
	●	SPECIAL FURNITURE HINGE 053-056


翻门配件 FLAP DOOR FITTINGS		
	●	FLAP STAY 059-072
	●	HYDRAULIC STAY 068-068
	●	LID STAY 071-071
	●	GAS SPRING 069-069

移门配件 SLIDING DOOR FITTINGS		
	●	EMBEDDED SLIDING DOOR 075-082
	●	TRANSLATIONAL SLIDING DOOR 083-083
	●	OVERLAY SLIDING DOOR 084-087
	●	FOLDING SLIDING DOOR 089-091
	●	DOORS STRAIGHTENER 092-092

SLIDE



Slide Width



Slide Thickness



Drawer Length



Soft Closing



Self Closing



Square Rod



Round Rod



Touch Open



Max. Capacity



Package


SLIDING DOOR FITTINGS



Translational Sliding Door



Overlay Sliding Door



Overlay Sliding Door



Embedded Sliding Door




Folding Sliding Door

FLAP DOOR FITTINGS




Inner cabinet height



Inner cabinet depth



Inner cabinet width




Door thickness




Soft opening




Standard opening



Self closing



Soft closing




Double buffering



Free stay




Double open



Package

HINGE



Soft Closing Hinge




3D Adjustable



Opening angle



-30°



Hole distance




-45°



Diameter of hinge cup



30°



Depth of hinge cup



45°



Door Panel Thickness



90°



Up & Down Adjustment



115°



Overlay Position Adjustment (Left & Right)



135°



Door Gap Adjustment (Forward & Backward)



180°




Height of Mounting Plate



270°



Type of Mounting Plate



Without Spring



2D Adjustable




Touch open



Package

SLIDE

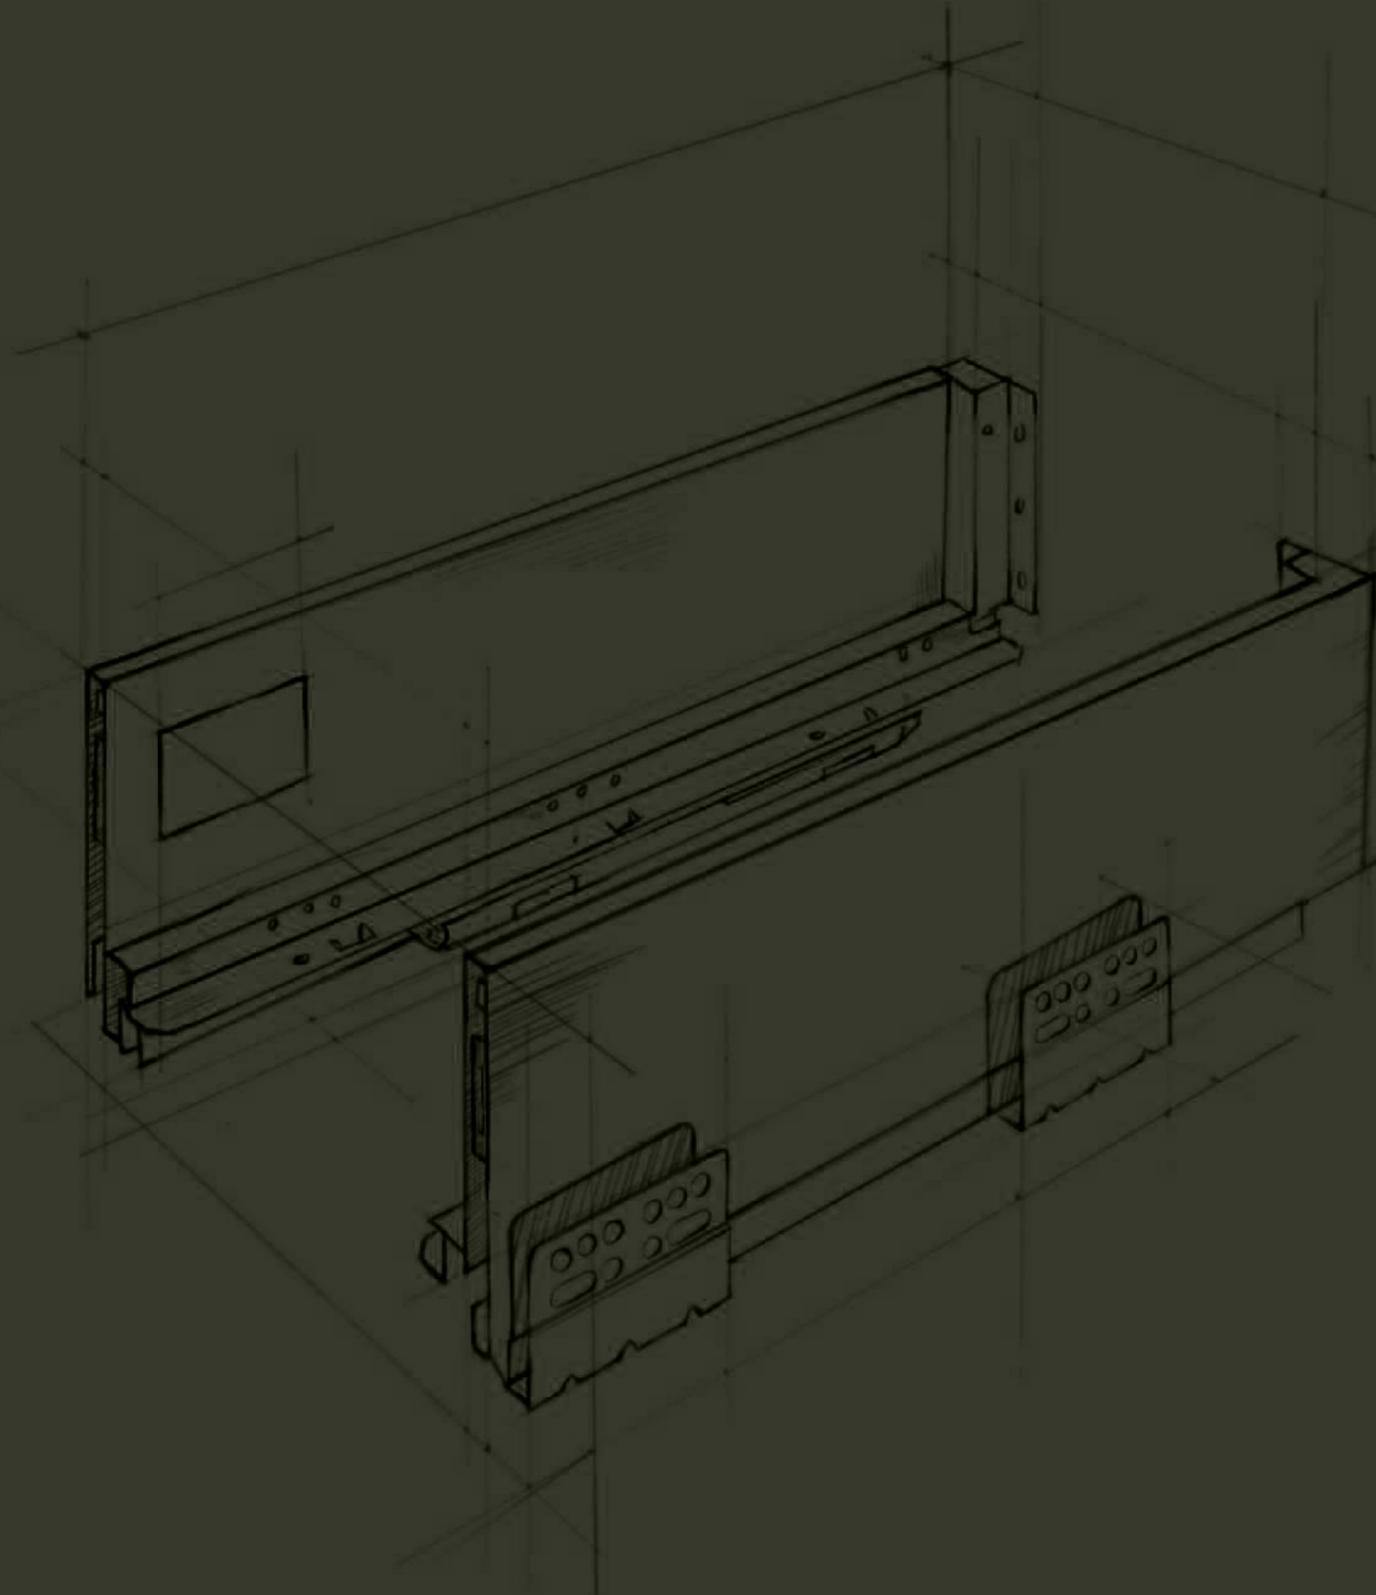


BALL BEARING SLIDE



ROLLER SLIDE




STEEL DRAWER SLIDE

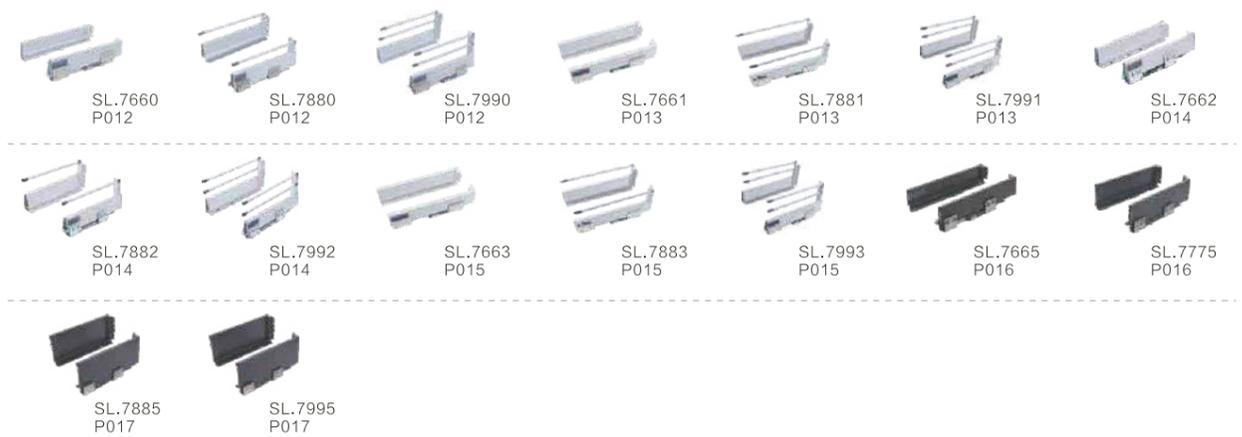

UNDERMOUNT SLIDE



FURNITURE TURNTABLE

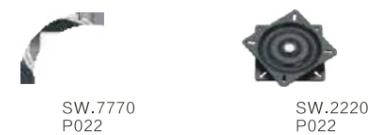

Dimensional data not binding, We reserve the right to alter specifications without notice.

FULL EXTENSION BALL BEARING SLIDE(SOFT CLOSING)



Material: Cold-rolled Steel
 Finish: Zinc Plated+Galvanized passivation/ Black electrophoresis
 Installation: Side mounted/ Screw fixing
 Description: Full extension / Detachable inner slide
 Features: Silent System. The integrated soft-closing mechanism makes drawer close gently and quietly;
 Galvanized passivation for better anti-rust effect.

Item No.	mm	mm	mm	mm	kg	pairs/ctn
SL.8450	45 mm	1.1 × 1.1 × 1.2 mm	300-600 mm	35 kg	15 pairs/ctn	
SL.8452	45 mm	1.2 × 1.2 × 1.4 mm	300-600 mm	35 kg	15 pairs/ctn	
SL.8457	45 mm	1.2 × 1.2 × 1.4 mm	300-600 mm	35 kg	15 pairs/ctn	



SL.8450
Create with topcent

SL.8452
Create with topcent

SL.8457
Create with topcent

FULL EXTENSION BALL BEARING SLIDE(SOFT CLOSING)



Material: Cold-rolled Steel
 Finish: Zinc Plated+Galvanized passivation/Black electrophoresis
 Installation: Side mounted/ Screw fixing
 Description: Full extension / Detachable inner slide
 Features: Silent System. The integrated soft-closing mechanism makes drawer close gently and quietly;
 Galvanized passivation for better anti-rust effect.

Item No.	mm	mm	mm	mm	kg	pairs/ctn
SL.8460	45 mm	1.2 × 1.2 × 1.5 mm	300-300mm	35kg	10 pairs/ctn	
SL.8461	45 mm	1.0 × 1.0 × 1.2 mm	300-300mm	30kg	15 pairs/ctn	
SL.8462	45 mm	1.0 × 1.0 × 1.2 mm	300-300mm	30kg	15 pairs/ctn	



SL.8460
Create with topcent

SL.8461
Create with topcent

SL.8462
Create with topcent

SLIDE

FULL EXTENSION BALL BEARING SLIDE(PUSH OPEN)



Material: Cold-rolled Steel
 Finish: Zinc Plated+Galvanized passivation/Black electrophoresis
 Installation: Side mounted/ Screw fixing
 Description: Full extension / Detachable inner slide
 Features: Push to open and close mechanism; suitable for handle-free front panel; Galvanized passivation for better anti-rust effect.

Item No.	45mm	4mm	mm	kg	
SL.9453	45 mm	1.2 × 1.2 × 1.5 mm	300-600 mm	35 kg	15 pairs/ctn
SL.9455	45 mm	1.2 × 1.2 × 1.5 mm	300-600 mm	35 kg	15 pairs/ctn



SL.9453
Create with topcent



SL.9455
Create with topcent

FULL EXTENSION BALL BEARING SLIDE(PUSH OPEN)



Material: Cold-rolled Steel
 Finish: Zinc plated/Galvanized passivation/Black electrophoresis
 Installation: Side mounted/ Screw fixing
 Description: Full extension / Detachable inner slide
 Features: Push to open and close mechanism; suitable for handle-free front panel; Galvanized passivation for better anti-rust effect.

Item No.	45mm	4mm	mm	kg	
SL.9456	45mm	1.2 × 1.2 × 1.5mm	300-600mm	35 kg	15 pairs/ctn
SL.9457	45mm	1.2 × 1.2 × 1.2mm	300-600mm	35 kg	15 pairs/ctn
SL.9458	45mm	1.2 × 1.2 × 1.5mm	300-600mm	35 kg	10 pairs/ctn



SL.9456
Create with topcent



SL.9457
Create with topcent



SL.9458
Create with topcent

SLIDE

FULL EXTENSION BALL BEARING SLIDE WITH HANGER



Material: Cold-rolled Steel
 Finish: Zinc plated+Galvanized passivation/ Black electrophoresis /Zinc plated
 Installation: Side mounted/ Screw fixing
 Description: Full extension / Detachable inner slide
 Features: Galvanized passivation for better anti-rust effect



SL.3356

Create with topcent

45mm	1.2 x 1.2 x 1.5mm	350-550mm	30kg	15 pairs/ctn

FULL EXTENSION BALL BEARING SLIDE



Material: Cold-rolled Steel
 Finish: Zinc plated+Galvanized passivation/ Black electrophoresis /Zinc plated
 Installation: Side mounted/ Screw fixing
 Description: Full extension / Detachable inner slide / optional 2-ball to 6-ball bearing
 Features: Galvanized passivation for better anti-rust effect



SL.3000


Create with topcent



Transparent rubber Black rubber T-shape rubber 2-Ball series 3-Ball series or as required

Item No.					
SL.3451	45mm	1.2 x 1.2 x 1.4mm	250-600mm	30kg	15 pairs/ctn
SL.3454	45mm	1.2 x 1.2 x 1.2mm	250-600mm	30kg	15 pairs/ctn
SL.3452	45mm	1.0 x 1.0 x 1.2mm	250-600mm	30kg	15 pairs/ctn
SL.3453	45mm	1.0 x 1.0 x 1.0mm	250-600mm	30kg	15 pairs/ctn
SL.3458	45mm	0.9 x 0.9 x 1.0mm	250-600mm	30kg	15 pairs/ctn

FULL EXTENSION BALL BEARING SLIDE WITH HANGER(FOR STEEL DRAWER)

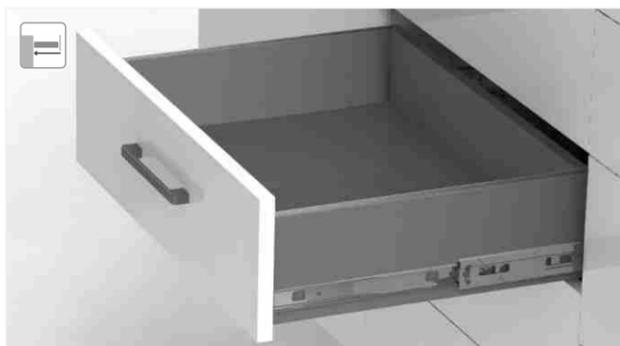

Material: Cold-rolled Steel
 Finish: Galvanized passivation/ Black electrophoresis
 Installation: Side mounted / Fixed with its hanger
 Description: Full extension / Detachable inner slide
 Features: Suitable for steel drawer



SL.3601

Create with topcent

45mm	1.2 x 1.2 x 1.2mm	550mm	35kg	15 pairs/ctn

OPTIONAL ACCESSORY



BP.2790

made by topcent

- External buffer
- Applicable to metal box drawer slide



SL.2740

made by topcent

- American ball bearing slide holder Material: Iron
- Applicable to 45mm width Ball Bearing Slide Finish: Zinc

SLIDE

FULL EXTENSION BALL BEARING SLIDE



Material: Cold-rolled Steel
 Finish: Zinc plated+Galvanized passivation/ Black electrophoresis /Zinc plated
 Installation: Side mounted/ Screw fixing
 Description: Full extension / Detachable inner slide / optional 2-ball to 6-ball bearing
 Features: Galvanized passivation for better anti-rust effect



SL.3000
 Create with topcent

Item No.	mm	mm	mm	mm	kg	pairs/ctn
SL.3431	43mm	1.0 × 1.0 × 1.0mm	250-600mm	30kg	15 pairs/ctn	
SL.3422	42mm	0.9 × 0.9 × 0.9mm	250-600mm	30kg	15 pairs/ctn	
SL.3421	42mm	0.8 × 0.8 × 0.8mm	250-600mm	30kg	15 pairs/ctn	
SL.3420	42mm	0.75x0.75x0.8 mm	250-600mm	30kg	15 pairs/ctn	

OPTIONAL ACCESSORY



- External buffer
- Applicable to metal box drawer slide

FULL EXTENSION BALL BEARING SLIDE



Material: Cold-rolled Steel
 Finish: Zinc plated+Galvanized passivation/ Black electrophoresis /Zinc plated
 Installation: Side mounted/ Screw fixing
 Description: Full extension / Detachable inner slide / optional 2-ball to 6-ball bearing
 Features: Galvanized passivation for better anti-rust effect



SL.3000
 Create with topcent

Item No.	mm	mm	mm	mm	kg	pairs/ctn
SL.3351	35mm	0.8x0.8x0.8 mm	250-600mm	30kg	20 pairs/ctn	
SL.3352	35mm	1.0x1.0x1.0 mm	250-600mm	30kg	20 pairs/ctn	
SL.3353	35mm	0.9x0.9x0.9 mm	250-600mm	30kg	20 pairs/ctn	
SL.3301	30mm	0.65x0.65x0.65 mm	250-600mm	30kg	20 pairs/ctn	
SL.3303	30mm	0.8x0.8x0.8 mm	250-600mm	30kg	20 pairs/ctn	

OPTIONAL ACCESSORY



- External buffer
- Applicable to metal box drawer slide

SLIDE

FULL EXTENSION STAINLESS STEEL BALL BEARING SLIDE



Material: Stainless steel
 Finish: Primary color
 Installation: Side mounted/ Screw fixing
 Description: Full extension / Detachable inner slide
 Features: Galvanized passivation for better anti-rust effect



SL.3145

Create with topcent

45mm	1.2 x 1.2 x 1.2mm	350-550mm	35kg	15 pairs/ctn

POWDER COATED ROLLER SLIDE



SL.1211

Create with topcent

SL.1212

Create with topcent

SL.1213

Create with topcent



SL.1221

Create with topcent

SL.1222

Create with topcent

SL.1223

Create with topcent

Material: Cold rolled Steel
 Finish: White / Black
 Installation: Side mounted / Screw fixing
 Description: Full-extension / Detachable inner side
 Features: POM roller for better wear-resistant and more smoother;

SINGLE EXTENSION BALL BEARING SLIDE



Material: Cold-rolled Steel
 Finish: Zinc Plated/Black/White
 Installation: Side mounted/ Base mounted/ Screw fixing
 Description: Single-extension / Detachable inner slide
 Features: Galvanized passivation for better anti-rust effect



SL.2272

Create with topcent

SL.2273

Create with topcent

Item No.					
SL.2272	27mm	1.0 x 1.0mm	250-600mm	30kg	15 pairs/ctn
SL.2273	27mm	0.8 x 0.8mm	250-600mm	30kg	15 pairs/ctn



SL.1231

Create with topcent

SL.1232

Create with topcent

SL.1234

Create with topcent

Item No.				
SL.1211	1.2 mm	250-600 mm	35 kg	25 pairs/ctn
SL.1212	1.0 mm	250-600 mm	30 kg	25 pairs/ctn
SL.1213	0.8 mm	250-600 mm	25 kg	25 pairs/ctn
SL.1221	1.2 mm	250-600 mm	35 kg	25 pairs/ctn
SL.1222	1.0 mm	250-600 mm	30 kg	25 pairs/ctn
SL.1223	0.8 mm	250-600 mm	25 kg	25 pairs/ctn
SL.1231	1.2 mm	250-600 mm	35 kg	25 pairs/ctn
SL.1232	1.0 mm	250-600 mm	30 kg	25 pairs/ctn
SL.1234	0.8 mm	250-600 mm	25 kg	25 pairs/ctn

SLIDE

METAL BOX ROLLER SLIDE



SL.6086

Create with topcent



SL.6118

Create with topcent



SL.6150

Create with topcent

Material: Cold-rolled Steel
 Finish: White, Grey
 Installation: Side mounted / Screw fixing
 Description: Full-extension / Detachable inner slide
 Features: POM roller for better wear-resistant and more smoother;

Item No.					
SL.6086	86 mm	1.2/1.1/1.0 mm	270-600 mm	35 kg	10 pairs/ctn
SL.6118	118 mm	1.2/1.1/1.0 mm	270-700 mm	35 kg	10 pairs/ctn
SL.6150	150 mm	1.2/1.1/1.0 mm	270-600 mm	35 kg	10 pairs/ctn

FULL -EXTENSION STEEL DRAWER SLIDE(FIXED-ON TYPE)



SL.7660

Create with topcent



SL.7880

Create with topcent

Material: Cold-rolled Steel
 Finish: Silver grey, white grey
 Description: Full extension / 2D adjustable of drawer panel
 Features: Silent System. The built-in soft-closing mechanism makes drawer close gently and quietly

Item No.					
SL.7660	66 mm	Round Rod	270-550 mm	35 kg	6 sets/ctn
SL.7880	140 mm	Round Rod	270-550 mm	35 kg	6 sets/ctn
SL.7990	180 mm	Round Rod	270-550 mm	35 kg	6 sets/ctn



SL.7990

Create with topcent


SLIDE

FULL -EXTENSION STEEL DRAWER SLIDE(FIXED-ON TYPE)



SL.7661

Create with topcent

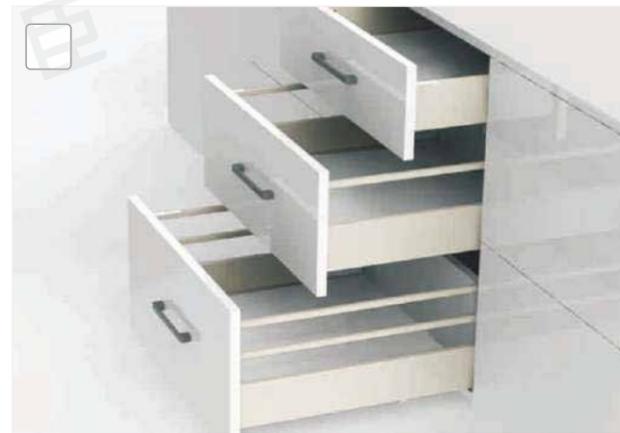

SL.7881

Create with topcent



SL.7991

Create with topcent

Material: Cold-rolled Steel
 Finish: Silver grey, white grey
 Description: Full extension / 2D adjustable of drawer panel
 Features: Silent System. The built-in soft-closing mechanism makes drawer close gently and quietly

Item No.					
SL.7661	66 mm	Square Rod	270-550 mm	35 kg	6 sets/ctn
SL.7881	140 mm	Square Rod	270-550 mm	35 kg	6 sets/ctn
SL.7991	180 mm	Square Rod	270-550 mm	35 kg	6 sets/ctn

FULL -EXTENSION STEEL DRAWER SLIDE(CLIP-ON TYPE)



SL.7662

Create with topcent



SL.7882

Create with topcent

Material: Cold-rolled Steel
 Finish: Silver grey, white grey
 Description: Full extension / 2D adjustable of drawer panel
 Features: Silent System. The built-in soft-closing mechanism makes drawer close gently and quietly

Item No.					
SL.7662	66 mm	Round Rod	270-550 mm	35 kg	6 sets/ctn
SL.7882	140 mm	Round Rod	270-550 mm	35 kg	6 sets/ctn
SL.7992	180 mm	Round Rod	270-550 mm	35 kg	6 sets/ctn



SL.7992

Create with topcent

Clip-on Buckle



SLIDE

FULL -EXTENSION STEEL DRAWER SLIDE(CLIP-ON TYPE)



SL.7663

Create with topcent



SL.7883

Create with topcent

Material: Cold-rolled Steel
 Finish: Silver grey, white grey
 Description: Full extension / 2D adjustable of drawer panel
 Features: Silent System. The built-in soft-closing mechanism makes drawer close gently and quietly

Item No.					
SL.7663	66 mm	Round Rod	270-550 mm	35 kg	6 sets/ctn
SL.7883	140 mm	Round Rod	270-550 mm	35 kg	6 sets/ctn
SL.7993	180 mm	Round Rod	270-550 mm	35 kg	6 sets/ctn



SL.7993

Create with topcent



FULL -EXTENSION STEEL DRAWER SLIDE(ULTRA THIN TYPE)



Material: Cold-rolled Steel
 Finish: Silver grey, white grey
 Description: Full extension/ Detachable inner slide/ Removal of front panel
 Features: Silent System. The built-in soft-closing mechanism makes drawer close gently and quietly. Easy to disassemble.
 Passivating treatment for better anti-rust effect
 Easy to disassemble.

84mm	116mm	270-550mm	40kg	6 sets/ctn




SL.7665

Create with topcent



SL.7775

Create with topcent



SLIDE

FULL-EXTENSION STEEL DRAWER SLIDE(ULTRA THIN TYPE)



Material: Cold-rolled Steel
 Finish: Silver grey / White grey
 Installation: Side mounted / Screw fixing
 Description: Full extension / Detachable inner slide / Removal of front panel
 Features: Silent System. The built-in soft-closing mechanism makes drawer close gently and quietly. Easy to disassemble.
 Passivating treatment for better anti-rust effect
 Easy to disassemble.

167mm 199mm	270-550mm	40kg	5 sets/ctn



SL.7885
Create with topcent




SL.7995
Create with topcent

FULL EXTENSION UNDERMOUNT SLIDE(SOFT CLOSING)



Material: Cold-rolled Steel
 Finish: Zinc Plated
 Installation: Base mounted / Screw fixing
 Description: Full extension / Detachable drawer / Drawer height could be adjusted +4.5mm
 Features: Silent System. The built-in soft-closing mechanism makes drawer close gently and quietly. Easy to disassemble.

-	1.0×1.4×1.8mm	250-550mm	30kg 10 pairs/ctn

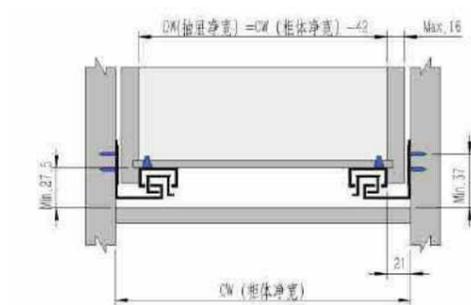

SL.4322
Create with topcent




SL.4325
Create with topcent

SLIDE

SINGLE EXTENSION UNDERMOUNT SLIDE (SOFT CLOSING)



Material: Cold-rolled Steel
 Finish: Zinc Plate
 Installation: Base mounted/ Screw fixing
 Description: Single extension / Detachable drawer/ Drawer height could be adjusted +4.5mm
 Features: Silent System. The built-in soft-closing mechanism makes drawer close gently and quietly. Easy to disassemble.

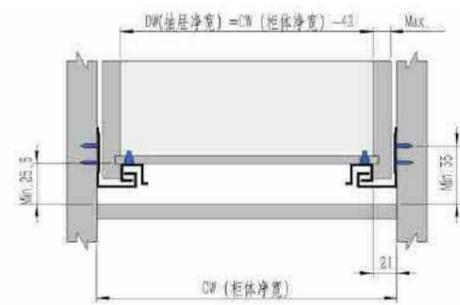


-	1.5 x 1.5mm	250-550mm	30kg	10 pairs/ctn

SINGLE EXTENSION UNDERMOUNT SLIDE (PUSH OPEN)



Material: Cold-rolled Steel
 Finish: Zinc Plate
 Installation: Base mounted/ Screw fixing
 Description: Single extension / Detachable drawer/ Drawer height could be adjusted +4.5mm
 Features: Handleless push open system; The built-in soft-closing mechanism makes drawer close gently and quietly. Easy to disassemble.

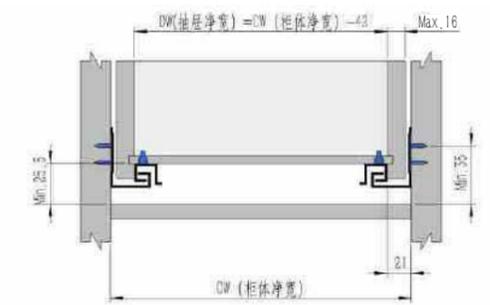

-	1.5 x 1.5mm	250-550mm	30kg	10 pairs/ctn



SL.4221
Create with topcent



SL.4222
Create with topcent



SL.4231
Create with topcent




SL.4232
Create with topcent

SLIDE

FULL-EXTENSION UNDERMOUNT SLIDE (PUSH OPEN)



Material: Cold-rolled Steel
 Finish: Zinc Plate
 Installation: Base mounted/ Screw fixing
 Description: Full extension / Detachable drawer / Drawer height could be adjusted +4.5mm
 Features: Built-in push open mechanism

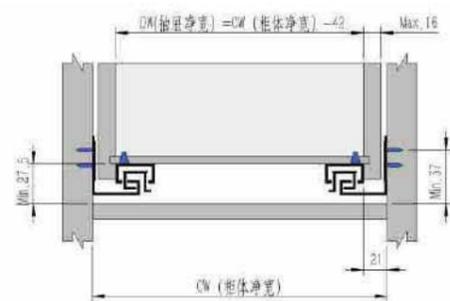

-	1.0×1.4×1.8mm	250-550mm	30kg 10 pairs/ctn



SL.4321
Create with topcent




SL.4332
Create with topcent

FURNITURE TURNTABLE



Material: Aluminium Alloy
 Finish: Matt
 Installation: Screw fixing
 Description: Optional sizes for different weight capacity



A(mm)	B(mm)
140	8.2
203	10
225	10
250	8.5/10
300	8.5/9/10
350	8.5/9/10
391	8.5/9/10
448	10
456	10
506	10/12
600	12
689	14
797	14
987	17

10 pairs/ctn

SW.7770
Create with topcent


FURNITURE TURNTABLE



Material: Steel
 Finish: Black
 Installation: Screw fixing


10 pairs/ctn

A	B	C	D	E	F	G
198	217	152	8.5×22	160	22	2.0
147	170	120	7×18	120	22	2.0



SW.2220
Create with topcent

HINGE

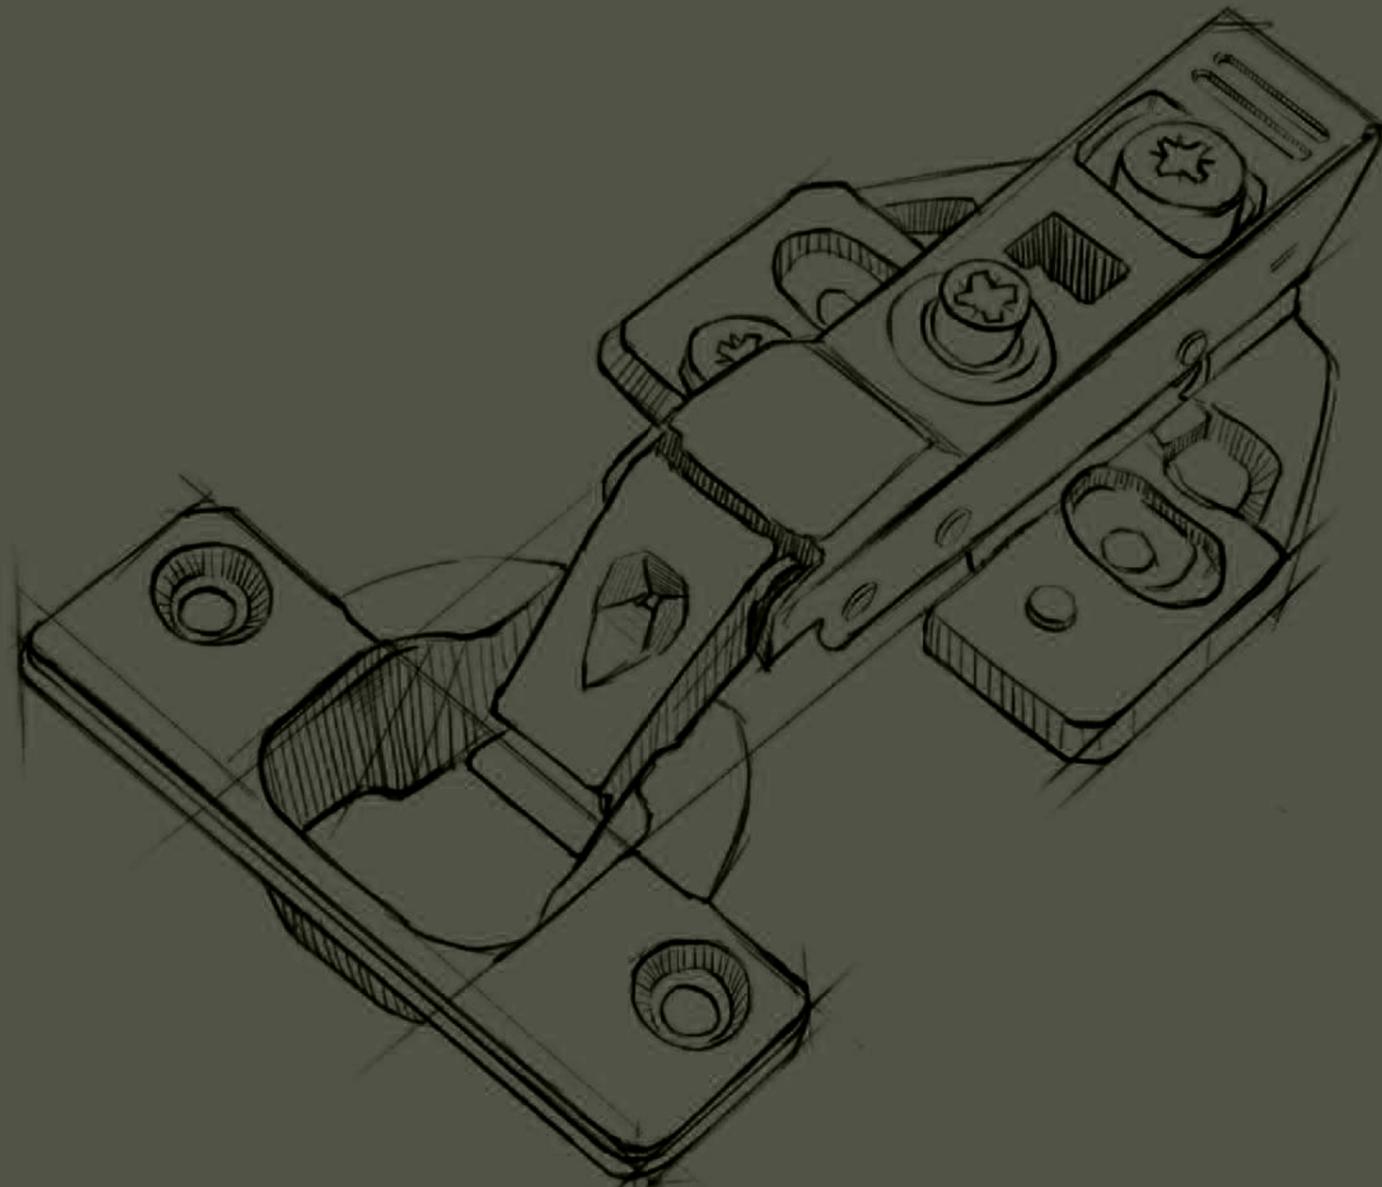

35MM CUP CONCEALED HINGE

CH.5559/8/7 P025	CH.3339/8/7 P025	CH.7179/8/7 P026	CH.9179/8/7 P026	CH.2269/8/7 P027	CH.3369/8/7 P027	CH.9919/8/7 P028	CH.9929/8/7 P028	CH.9999/8/7 P029	CH.9939/8 P029
CH.9979/8/7 P030	CH.9969/8/7 P030	CH.5159/8/7 P031	CH.3139/8/7 P031	CH.7679/8/7 P032	CH.9679/8/7 P032	CH.3169/8/7 P033	CH.2689/8/7 P034	CH.2679/8/7 P034	CH.1029/8/7 P035
CH.1019/8/7 P035	CH.2619/8/7 P036	CH.2669/8/7 P036	CH.2819/8/7 P037	CH.2849/8/7 P037	CH.2889/8/7 P038	CH.8030 P045	CH.8045 P045	CH.7030 P045	CH.7045 P045
CH.7090 P045	CH.7180 P045	CH.7115 P045	CH.7135 P045	CH.1659/8/7 P046	CH.1559/8/7 P046	CH.3659/8/7 P047	CH.3559/8/7 P047	CH.2659/8/7 P048	CH.2559/8/7 P048
CH.5045 P049	CH.5145 P049	CH.5090 P049	CH.5190 P049	CH.2710 P050	CH.2720 P050				

26/40MM CUP CONCEALED HINGE

CH.1039/8/7 P039	CH.2059/8/7 P051	CH.2069/8/7 P051	CH.6049/8/7 P052	CH.7049/8/7 P052

HINGE FOR GLASS DOOR / ALUMINIUM FRAME

CH.6129/8/7 P040	CH.7129/8/7 P040	CH.4129/8/7 P041	CH.5129/8/7 P041	CH.4049/8/7 P042	CH.4059/8/7 P042	CH.4069/8/7 P043	CH.4079/8/7 P043

AMERICAN CONCEALED HINGE

CH.6840 P044	CH.6841 P044	CH.6860 P044	CH.6861 P044	CH.6870 P044	CH.6871 P044	CH.6880 P044	CH.6881 P044

SPECIAL FURNITURE HINGE

CH.6050 P053	CH.6060 P053	CH.6030 P053	CH.6070 P053	SH.6010 P054	SH.6020 P054	SH.6050 P054	SH.6060 P054	SH.1330 P055	
SH.1340 P055	SH.3140 P055	SH.3150 P055	SH.1370 P055	SH.1350 P055	SH.1360 P055	SH.3180 P055	SH.3160 P056	SH.3810 P056	SH.3820 P056

Dimensional data not binding, We reserve the right to alter specifications without notice.

HINGE

ONE WAY SOFT CLOSING HINGE



2D

Material: Cold-rolled Steel
 Finish: Nickel
 Installation: Screw fixing
 Door Adjustment: 2D Adjustable
 Features: Silent System. The built-in concealed soft-closing mechanism makes cabinet close gently and quietly

SOFT CLOSING	105°	48 mm	35 mm	11.3 mm	14-23 mm
2-Hole 4-Hole	H=0	± 1.5	+ 5	+ 2.5	100 pcs/ctn

Fixed Mounting



式 Clip on Mounting



ONE WAY SOFT CLOSING HINGE



2D 3D

Material: Cold-rolled Steel
 Finish: Nickel
 Installation: Screw fixing
 Door Adjustment: 2D/3D Adjustable
 Features: Silent System. The built-in concealed soft-closing mechanism makes cabinet close gently and quietly

SOFT CLOSING	105°	48 mm	35 mm	11.3 mm	14-22 mm
-	H=0	± 1.5	+ 5	+ 2.5	100 pcs/ctn

式 Fixed Mounting




Clip on Mounting



HINGE

ONE WAY SOFT CLOSING HINGE

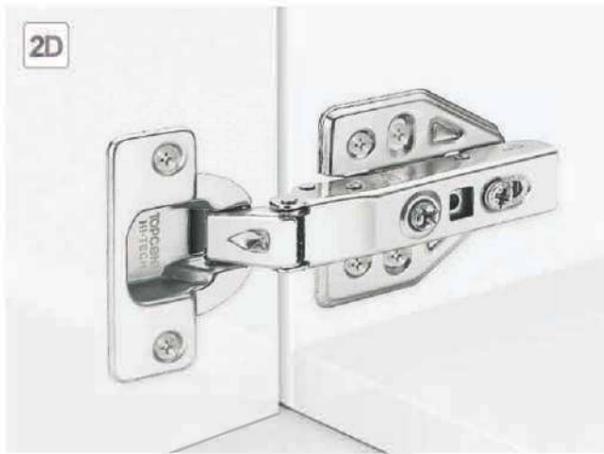

Material: Cold-rolled Steel
 Finish: Nickel
 Installation: Screw fixing
 Door Adjustment: 2D Adjustable
 Features: Silent System. The built-in concealed soft-closing mechanism makes cabinet close gently and quietly

SOFT CLOSING	105°	48 mm	35 mm	11.5 mm	14-22 mm
4-Hole	H=0	±2	+5	±2	100 pcs/ctn

Fixed Mounting



Full-overlay

CH.2269
 Create with topcent



Half-overlay

CH.2268
 Create with topcent



Inset

CH.2267
 Create with topcent

Clip on Mounting



Full-overlay

CH.3369
 Create with topcent



Half-overlay

CH.3368
 Create with topcent



Inset

CH.3367
 Create with topcent

ONE WAY SOFT CLOSING HINGE



Material: Cold-rolled Steel
 Finish: Nickel
 Installation: Screw fixing
 Door Adjustment: 2D/3D Adjustable
 Features: Silent System. The built-in concealed soft-closing mechanism makes cabinet close gently and quietly

SOFT CLOSING	105°	48 mm	35 mm	12.6 mm	14-22 mm
3D	H=0	±2.5	±3	±3	200 pcs/ctn

Linear Clip on Mounting Plate



Full-overlay

CH.9919
 Create with topcent



Half-overlay

CH.9918
 Create with topcent



Inset

CH.9917
 Create with topcent

Cross Clip on Mounting Plate



Full-overlay

CH.9929
 Create with topcent



Half-overlay

CH.9928
 Create with topcent



Inset

CH.9927
 Create with topcent

HINGE

ONE WAY/TWO WAY HINGE(3D ADJUSTABLE)



Material: Cold-rolled Steel
 Finish: Nickel
 Installation: Screw fixing
 Door Adjustment: 3D Adjustable
 Features: Silent System. The built-in concealed soft-closing mechanism makes cabinet close gently and quietly

SOFT CLOSING	105°	48 mm	35 mm	11.3 mm	14-22 mm
3D	H=0	± 1.5	+ 5	± 2.5	100 pcs/ctn

Fixed Mounting



Clip on Mounting



TWO WAY HINGE(3D ADJUSTABLE)



Material: Cold-rolled Steel
 Finish: Nickel
 Installation: Screw fixing
 Door Adjustment: 3D Adjustable
 Features: Silent System. The built-in concealed soft-closing mechanism makes cabinet close gently and quietly

SOFT CLOSING	105°	48 mm	35 mm	11.3 mm	14-23 mm
3D	H=0	± 1.5	+ 5	+ 2.5	100 pcs/ctn

Fixed Mounting



Clip on Mounting



HINGE

ONE WAY STAINLESS STEEL SOFT CLOSING HINGE



2D

Material: Stainless steel(201/304)
 Finish: Polished
 Installation: Screw fixing
 Door Adjustment: 2D Adjustable
 Features: Silent System. The built-in concealed soft-closing mechanism makes cabinet close gently and quietly

SOFT CLOSING	105°	48 mm	35 mm	11.3 mm	14-23 mm
2-Hole 4-Hole	H=0	±2	+5	±2	100 pcs/ctn

Fixed Mounting



Clip on Mounting



ONE WAY STAINLESS STEEL SOFT CLOSING HINGE



2D

3D

Material: Stainless steel (201)
 Finish: Polished
 Installation: Screw fixing
 Door Adjustment: 2D/3D Adjustable
 Features: Silent System. The built-in concealed soft-closing mechanism makes cabinet close gently and quietly

SOFT CLOSING	105°	48 mm	35 mm	11.5 mm	14-22 mm
-	H=0	±2	+5	±2	100 pcs/ctn

Fixed Mounting



Clip on Mounting



HINGE

ONE WAY STAINLESS STEEL SOFT CLOSING HINGE



Material: Stainless steel (201)
 Finish: Polished
 Installation: Screw fixing
 Door Adjustment: 2D Adjustable
 Features: Silent System. The built-in concealed soft-closing mechanism makes cabinet close gently and quietly

SOFT CLOSING	105°	48 mm	35 mm	11.5 mm	14-22 mm
4-Hole	H=0	±2	+5	±2	100 pcs/ctn

Clip on Mounting

Full-overlay CH.3169 Create with topcent	Half-overlay CH.3168 Create with topcent	Inset CH.3167 Create with topcent

TWO WAY HINGE



Material: Cold-rolled Steel
 Finish: Nickel
 Installation: Screw fixing
 Door Adjustment: 2D Adjustable
 Features: Two-way self-closing mechanism can prolong hinge working life span.

SELF CLOSING	100°	48 mm	35 mm	11.3 mm	14-23 mm
2-Hole 4-Hole	H=0	-	-	-	200 pcs/ctn

Fixed Mounting

Full-overlay CH.2689 Create with topcent	Half-overlay CH.2688 Create with topcent	Inset CH.2687 Create with topcent

Fixed Mounting

Full-overlay CH.2679 Create with topcent	Half-overlay CH.2678 Create with topcent

HINGE

ONE WAY HINGE



2D

Material: Cold-rolled Steel
 Finish: Nickel
 Installation: Screw fixing
 Door Adjustment: 2D Adjustable
 Features: One way self-closing mechanism.

SELF CLOSING	100°	48 mm	35 mm	11.3 mm	14-23 mm
2-Hole 4-Hole	H=0	-	-	-	200 个/箱 200 pcs/ctn

Fixed Mounting



Fixed Mounting



TWO WAY HINGE



2D

Material: Cold-rolled Steel
 Finish: Nickel
 Installation: Screw fixing
 Door Adjustment: 2D Adjustable
 Features: Two-way self-closing mechanism can prolong hinge working life span.

SELF CLOSING	100°	48 mm	35 mm	11.3 mm	14-23 mm
2-Hole 4-Hole	H=0	-	-	-	200 pcs/ctn

Fixed Mounting



Clip on Mounting



HINGE

PUSH OPEN HINGE



2D

Material: Cold-rolled Steel
 Finish: Nickel
 Installation: Screw fixing
 Door Adjustment: 2D Adjustable
 Features: Self-opening mechanism.

TOUCH OPEN	100°	48 mm	35 mm	11.3 mm	14-23 mm
2-Hole 4-Hole	-	-	-	-	200 pcs/ctn

Fixed Mounting



Clip on Mounting



ONE WAY HINGE



2D

Material: Cold-rolled Steel
 Finish: Nickel
 Door Adjustment: 2D Adjustable
 Features: Without Spring

WITHOUT SPRING	95°	48 mm	35 mm	9.5 mm	14-22 mm
2-Hole 4-Hole	-	-	-	-	200 pcs/ctn

Clip on Mounting



HINGE

26MM CUP ONE WAY HINGE



Material: Cold-rolled Steel
 Finish: Nickel
 Door Adjustment: 2D Adjustable
 Features: self-closing mechanism.

SELF CLOSING	95°	48 mm	26 mm	9.5 mm	14-22 mm
2-Hole 4-Hole	-	-	-	-	200 pcs/ctn

Fixed Mounting



ONE WAY SOFT CLOSING HINGE(FOR GLASS DOOR)



Material: Cold-rolled Steel
 Finish: Nickel
 Installation: Screw fixing
 Door Adjustment: 2D Adjustable
 Features: Silent System. The built-in concealed soft-closing mechanism makes cabinet close gently and quietly

SOFT CLOSING	105°	40 mm	35 mm	11.3 mm	3-6 mm
2-Hole 4-Hole	H=0	± 1.5	+ 5	+ 2.5	100 pcs/ctn

Fixed Mounting



Optional Cover



Clip on Mounting



Optional Cover



HINGE

26MM CUP ONE WAY SOFT CLOSING HINGE(FOR GLASS DOOR)



Material: Cold rolled Steel
 Finish: Nickel
 Installation: Screw fixing
 Door Adjustment: 2D Adjustable
 Features: Silent System. The built-in concealed soft-closing mechanism makes cabinet close gently and quietly

SOFT CLOSING	95°	48 mm	26 mm	11.3 mm	3-6 mm
2-Hole 4-Hole	H=0	± 1.5	+ 5	+ 2.5	200 pcs/ctn

Fixed Mounting			Optional Cover
Full-overlay CH.4129 Create with topcent	Half-overlay CH.4128 Create with topcent	Inset CH.4127 Create with topcent	光铬 Chrome
			光金 Golden
			黑色 Black

Clip on Mounting			Optional Cover
Full-overlay CH.5129 Create with topcent	Half-overlay CH.5128 Create with topcent	Inset CH.5127 Create with topcent	光铬 Chrome
			光金 Golden
			黑色 Black

TWO WAY HINGE(FOR ALUMINIUM FRAME)



Material: Cold-rolled Steel
 Finish: Nickel
 Installation: Screw fixing
 Door Adjustment: 2D Adjustable
 Features: Two-way self-closing mechanism can prolong hinge working life span.

SELF CLOSING	105°	-	-	-	19 mm
2-Hole 4-Hole	H=0	± 1.5	+ 5	+ 2.5	100 pcs/ctn

Fixed Mounting		
Full-overlay CH.4049 Create with topcent	Half-overlay CH.4048 Create with topcent	Inset CH.4047 Create with topcent

Clip on Mounting		
Full-overlay CH.4059 Create with topcent	Half-overlay CH.4058 Create with topcent	Inset CH.4057 Create with topcent

HINGE

TWO WAY SOFT CLOSING HINGE(FOR ALUMINIUM FRAME)



Material: Cold-rolled Steel
 Finish: Nickel
 Installation: Screw fixing
 Door Adjustment: 2D Adjustable
 Features: Silent System. The built-in concealed soft-closing mechanism makes cabinet close gently and quietly

SOFT CLOSING	105°	-	-	-	-	-	-	19 mm
2-Hole 4-Hole	H=0	± 1.5	+ 5	+ 2.5	100 pcs/ctn			

Fixed Mounting

Full-overlay
CH.4069
Create with topcent

Half-overlay
CH.4068
Create with topcent

Inset
CH.4067
Create with topcent

Clip on Mounting

Full-overlay
CH.4079
Create with topcent

Half-overlay
CH.4078
Create with topcent

Inset
CH.4077
Create with topcent

AMERICAN HINGE



Material: Cold-rolled Steel
 Finish: Nickel
 Door Adjustment: 2D/3D Adjustable

-	95°	36 mm	35 mm	11.3 mm	14-23 mm
2-Hole	H=0	± 1.5	+ 5	+ 2.5	300 pcs/ctn

CH.6840
Create with topcent

CH.6841
Create with topcent

CH.6860
Create with topcent

CH.6861
Create with topcent

1-1/4", 1-3/8"
CH.6870
Create with topcent

1/2", 2", 1-1/4", 1-3/8"
CH.6871
Create with topcent

1/4", 1 1/4", 1 3/4", 1 3/8"
CH.6880
Create with topcent

1/2", 1 3/8", 1 1/4"
CH.6881
Create with topcent

HINGE

CORNER HINGE



2D

Material: Cold-rolled Steel
 Finish: Nickel
 Installation: Screw fixing
 Door Adjustment: 2D Adjustable

SOFT CLOSING	-	48 mm	35 mm	11.3 mm	14-20 mm
2-Hole 4-Hole	H=0	± 1.5	-	-	100 pcs/ctn


Fixed Mounting

-30°	-45°	30°	45°
CH.8030 Create with topcent	CH.8045 Create with topcent	CH.7030 Create with topcent	CH.7045 Create with topcent

Fixed Mounting

90°	180°	115°	135°
CH.7090 Create with topcent	CH.7180 Create with topcent	CH.7115 Create with topcent	CH.7135 Create with topcent

165° ONE WAY HINGE

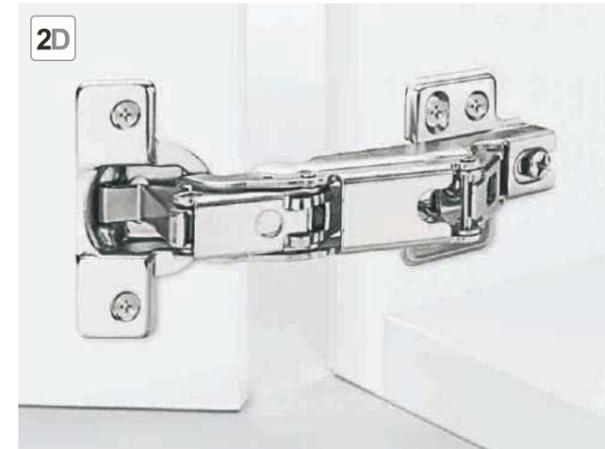

2D

Material: Cold-rolled Steel
 Finish: Nickel
 Installation: Screw fixing
 Door Adjustment: 2D Adjustable
 Features: Self-closing mechanism

SELF CLOSING	165°	48 mm	35 mm	11.3 mm	14-25 mm
2-Hole 4-Hole	H=0	± 1.5	+ 5	+ 2.5	100 pcs/ctn

Fixed Mounting

Full-overlay	Half-overlay	Inset
CH.1659 Create with topcent	CH.1658 Create with topcent	CH.1657 Create with topcent

Clip on Mounting

Full-overlay	Half-overlay	Inset
CH.1559 Create with topcent	CH.1558 Create with topcent	CH.1557 Create with topcent

HINGE

165° CORNER HINGE(SOFT CLOSING)



Material: Cold-rolled Steel
 Finish: Nickel
 Installation: Screw fixing
 Door Adjustment: 2D Adjustable
 Features: Silent System. The built-in concealed soft-closing mechanism makes cabinet close gently and quietly

SOFT CLOSING	165°	48 mm	35 mm	11.3 mm	12-26 mm
2-Hole 4-Hole	H=0	-	-	-	100 pcs/ctn

Fixed Mounting



165° WITHOUT SPRING HINGE



Material: Cold-rolled Steel
 Finish: Nickel
 Installation: Screw fixing
 Door Adjustment: 2D Adjustable
 Features: Without Spring

WITHOUT SPRING	165°	48 mm	35 mm	11.3 mm	14-25 mm
2-Hole 4-Hole	H=0	± 1.5	+ 5	+ 2.5	100 pcs/ctn

Fixed Mounting



HINGE

SOFT CLOSING CORNER HINGE



Material: Cold-rolled Steel
 Finish: Nickel
 Installation: Screw fixing
 Door Adjustment: 2D Adjustable
 Features: Silent System. The built-in concealed soft-closing mechanism makes cabinet close gently and quietly

Fixed Mounting		Clip on Mounting	
45°	45°		
CH.5045	CH.5145		
Create with topcent	Create with topcent		

SOFT CLOSING	110°	48 mm	35 mm	11.5 mm	14-23 mm
2 - Hole 4 - Hole	H=0	± 1.5	+ 5	+ 2.5	100 pcs/ctn

270° CORNER HINGE



Material: Cold-rolled steel
 Finish: Nickel
 Installation: Screw fixing
 Door Adjustment: 2D/3D Adjustable
 Features: Without Spring

Fixed Mounting		Clip on Mounting	
270°	270°		
CH.2710	CH.2720		
Create with topcent	Create with topcent		

WITHOUT SPRING	270°	48 mm	35 mm	11.3 mm	
-	14-19 mm	± 1.5	+ 5	± 2.5	100 pcs/ct



Material: Cold-rolled Steel
 Finish: Nickel
 Installation: Screw fixing
 Door Adjustment: 2D Adjustable
 Features: Silent System. The built-in concealed soft-closing mechanism makes cabinet close gently and quietly

Fixed Mounting		Clip on Mounting	
90°	90°		
CH.5090	CH.5190		
Create with topcent	Create with topcent		

SOFT CLOSING	95°	48 mm	35 mm	11.3 mm	14-23 mm
2 - Hole 4 - Hole	H=0	± 1.5	+ 5	+ 2.5	100 pcs/ctn

D=Required overlay on side blade

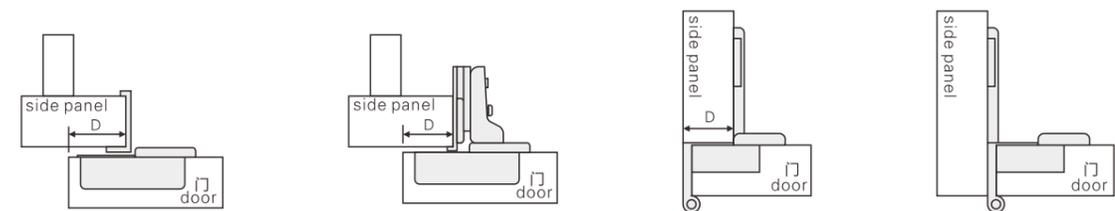


Table for comparison metric & british systems

1	1.5	2	3	4	5	5.5	6	7	8	9	9.5	10	11	12	13	mm
1/32	1/16	3/32	1/8	5/32	3/16	7/32	1/4	9/32	5/16	11/32	3/8	13/32	7/16	15/32	1/2	in
13.5	14	15	16	17	17.5	18	19	20	20.5	21	22	23	24	24.5	25.4	mm
17/32	9/16	19/32	5/8	21/32	11/16	23/32	3/4	25/32	13/16	27/32	7/8	29/32	15/16	31/32	1	in

HINGE

26MM CUP ONE WAY SOFT CLOSING HINGE



Material: Cold-rolled Steel
 Finish: Nickel
 Installation: Screw fixing
 Door Adjustment: 2D Adjustable
 Features: Silent System. The built-in concealed soft-closing mechanism makes cabinet close gently and quietly

SOFT CLOSING	95°	48 mm	26 mm	10.3 mm	14-18 mm
2-Hole 4-Hole	H=0	± 1.5	+ 5	+ 2.5	200 pcs/ctn

Fixed Mounting



Clip on Mounting



40MM CUP ONE WAY SOFT CLOSING HINGE



Material: Cold-rolled Steel
 Finish: Nickel
 Installation: Screw fixing
 Door Adjustment: 2D Adjustable
 Features: Silent System. The built-in concealed soft-closing mechanism makes cabinet close gently and quietly

SOFT CLOSING	95°	48 mm	40 mm	12.5 mm	20-25 mm
2-Hole 4-Hole	H=0	± 1.5	+ 5	+ 2.5	100 pcs/ctn

Fixed Mounting




Clip on Mounting



HINGE

SPRING HINGE

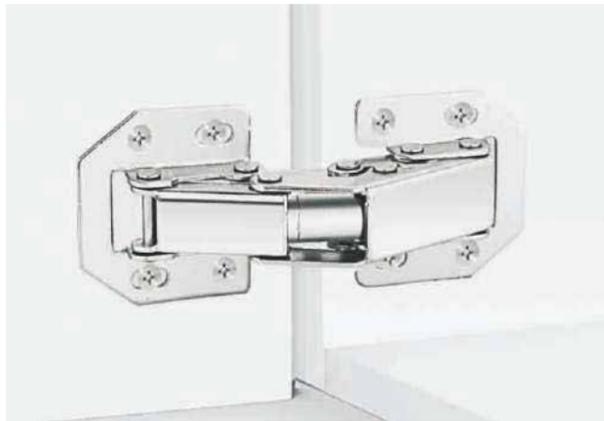

Material: Cold-Rolled Steel
Finish: Nickel
Thickness: 1.0 mm / 1.5 mm



CH.6050
Create with topcent



CH.6060
Create with topcent

CLOSING SPRING HINGE



Material: Cold-Rolled Steel
Finish: Nickel
Thickness: 1.5 mm



CH.6030
Create with topcent



CH.6070
Create with topcent


GLASS DOOR HINGE

Material: Zinc alloy
Finish: Golden/Chrome

250 pairs/ctn

SH. 6010

Create with topcent

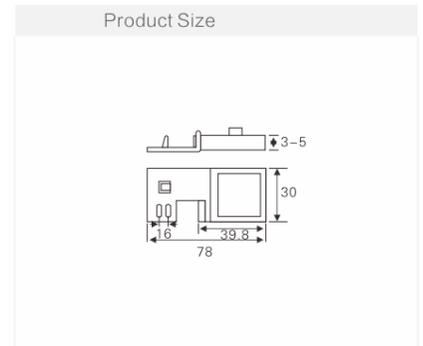


Material: Zinc alloy
Finish: Golden/Chrome

250 pairs/ctn

SH. 6020

Create with topcent

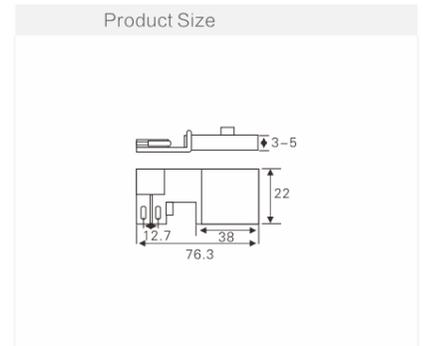


Material: Zinc alloy
Finish: Golden/Chrome/
Satin/Black/Pearl Chrome

250 pairs/ctn

SH. 6050

Create with topcent

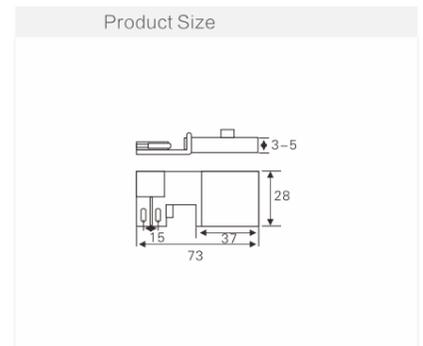


Material: Zinc alloy
Finish: Golden/Satin/Chrome

250 pairs/ctn

SH. 6060

Create with topcent

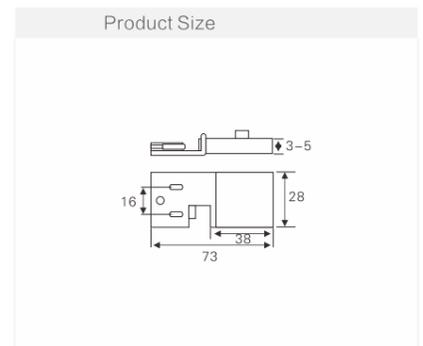


HINGE

INVISIBLE HINGE




SH. 1330
Create with topcent



Material: Zinc alloy
Finish: Golden/Chrome/
Antique bronze/
Antique cooper
250 pairs/ctn




SH. 1340
Create with topcent



Material: Zinc alloy
Finish: Zinc/Nickel
Board Thickness: 15/16 mm
250 pairs/ctn




SH. 3140
Create with topcent



Material: Zinc alloy+plastic
Finish: Brown/White
1000 pcs/ctn




SH. 3150
Create with topcent



Material: Steel+plastic
Finish: Brown
1000 pcs/ctn




SH. 1370
Create with topcent



Material: Zinc alloy
Finish: Nickel
1152 pcs/ctn




SH. 1350
Create with topcent



Material: Zinc alloy
Finish: Nickel
1000 pcs/ctn




SH. 1360
Create with topcent



Material: Zinc alloy
Finish: Nickel
600 pcs/ctn



SH. 3180
Create with topcent




Material: Zinc alloy
Finish: Nickel
100 pcs/ctn

INVISIBLE HINGE



SH. 3160
create with topcent

Material: Brass
Finish: Primary color/Nickel
1000
1000 pcs/ctn




Item NO.	Dimensions (mm)				Wood thickness	1000
	A	B	C	D		
M8	8	9.5	12	4	11 - 15	1000
M10	10	11	16.5	6.5	14 - 19	1000
M12	12	13.5	20	8	17 - 22	500
M14	14	15.5	23	9	20 - 26	500
M16	16	16.5	25	9	22 - 28	500
M17	18	17.5	27	9	24 - 32	300
M24	24	25	36.5	12.5	31 - 40	100



SH. 3820
create with topcent

Material: Zinc alloy+ Stainless steel
Finish: Chrome
1000 pcs/ctn




Item NO.	A	B	C	D	E	F	G	H	I	1000
118	25	117.5	18	64	1.6	36	11	9	64	20
95	117.3	24	41.6	90	18	36	23	73.5	65	40
70	70	16	27	52	11	23	14.3	46	33	100
60	60	13	26	46	10.7	18	12.7	37	30	100
45	45	13	21	32	9.5	17.5	8.5	37.5	17.5	576

3D ADJUSTABLE INVISIBLE HINGE




SH. 3810
create with topcent

Material: Zinc alloy+Iron
Finish: Chrome/Gold/Nickel
1000 pcs/ctn



Item NO.	A	B	C	D	E	F	G	H	I	1000
118	118	27	62	89	22	40	24	96	64	40
94	94	19.2	34	77	14	26.5	19	55	51.5	120
69	69	15.5	27	52	11	23	16	46	33	240
62	62	15.5	26	46	11	21	14.5	44	30	360
45	43	12	21	32	9	17.5	8.5	35	17.5	576

FLAP DOOR FITTINGS

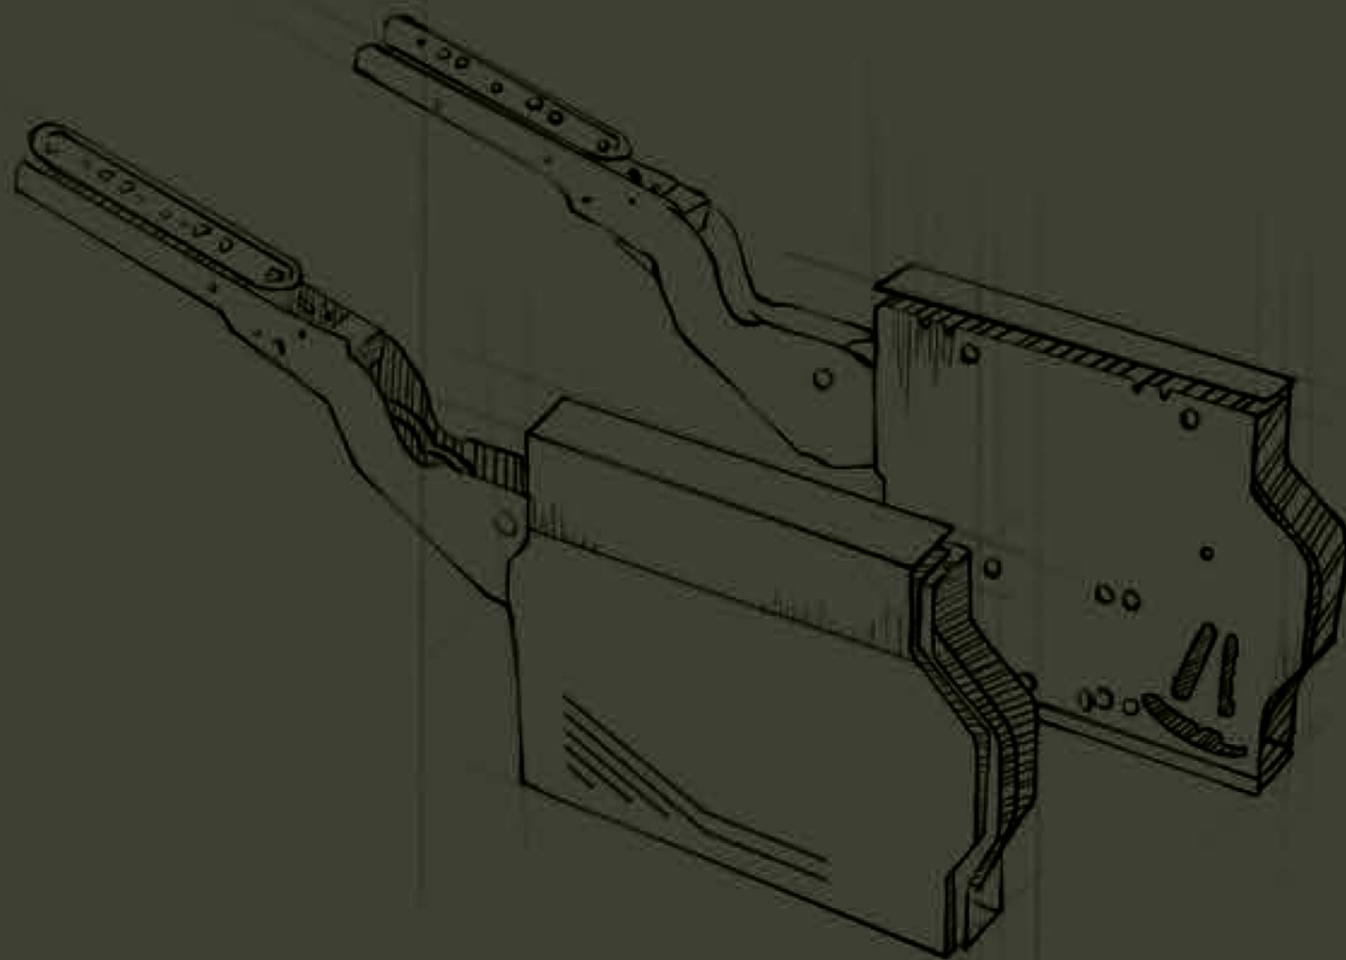

FLAP STAY



ST.6020
P059



ST.6021
P059



ST.6120
P060



ST.6130
P060



ST.6220
P061



ST.6240
P061



ST.6640
P062



ST.6641
P062



ST.6210
P063



ST.3210
P063



ST.6150
P064



ST.6160
P064



ST.6520
P065



ST.5000
P066



ST.6000
P066



ST.5120
P067



ST.5110
P067



ST.6180
P072

HYDRAULIC STAY



ST.3110
P068



ST.3120/3160/3140/3180
P068

LID STAY



ST.3201
P071



ST.3203
P071



ST.3202
P071



ST.3206
P071



ST.3205
P071

GAS SPRING



ST.2132
P069



ST.2134
P069



ST.2160
P069



ST.2145
P069

Dimensional data not binding, We reserve the right to alter specifications without notice.

FLAP DOOR FITTINGS

LIFT-UP FLAP SYSTEM



Material: Aluminum alloy + Steel + Plastic
 Finish: Grey
 Features: Self-closing mechanism

ST.6020

Create with topcent



600-900 mm 900-1200 mm	4 kg 9 kg	
320-450 mm	min.250 mm	10/5 sets/ctn

LIFT-UP FLAP SYSTEM



Material: Zinc alloy + Steel + Plastic
 Finish: Grey
 Features: Silent system and excellent internal soft opening and closing mechanism makes cabinet door open & close gently and quietly.

ST.6120

Create with topcent



600-800 mm	7 kg	
277-462 mm	min.182 mm	10 sets/ctn

UP & OVER LIFT SYSTEM



Material: Zinc alloy + Steel + Plastic
 Finish: Grey
 Features: Silent system and excellent internal soft opening and closing mechanism makes cabinet door open & close gently and quietly.

ST.6021

Create with topcent



600-900 mm 900-1200 mm	4 kg 9 kg	
320-450 mm	min.250 mm	10/5 sets/ctn



Material: Zinc alloy + Steel + Plastic
 Finish: Grey
 Features: Silent system and excellent internal soft opening and closing mechanism makes cabinet door open & close gently and quietly.

ST.6130

Create with topcent



600-800 mm	10.5 kg	
380-750 mm	min.182 mm	10 sets/ctn

FLAP DOOR FITTINGS

BI-FOLD LIFT SYSTEM



Material: Zinc alloy+Steel+Plastic
 Finish: Grey
 Features: Silent system and excellent internal soft closing mechanism makes cabinet door close gently and quietly.

ST.6220

Create with topcent



600-900 mm 600-900 mm	4 kg 9 kg
600-700 mm	min.250 mm
	10 pcs/ctn

FLAP STAY



Material: Zinc alloy + Steel + Plastic
 Finish: Grey
 Features: Silent system and excellent soft closing mechanism makes cabinet door close gently and quietly.

ST.6640

Create with topcent



Max.1200 mm	3-5 kg 6-8 kg 9-12 kg
300-600 mm	min.250 mm
	10 pcs/ctn



Material: Zinc alloy + Steel + Plastic
 Finish: Grey
 Features: Silent system and excellent internal soft closing mechanism makes cabinet door close gently and quietly.

ST.6240

Create with topcent



min.300 mm	5-7 kg
570-690 mm	min.300 mm
	10 sets/ctn



Material: Zinc alloy + Steel + Plastic
 Finish: Grey
 Features: Silent system and excellent soft closing mechanism makes cabinet door close gently and quietly.

ST.6641

Create with topcent



Max.800 mm	6-8 kg
Min.150 mm	Min.240 mm
	10 pcs/ctn

FLAP DOOR FITTINGS

HYDRAULIC FLAP STAY



Material: Zinc alloy + Steel + Plastic
 Finish: Grey
 Features: Self-closing mechanism

ST.6210

Create with topcent



Application	mm	kg
1 pc of light type	400-700 mm	3-4 kg
1 pc of heavy type	700-900 mm	4-5 kg
2 pcs of light type	900-1200 mm	6-8 kg
2 pcs of heavy type	1200-1600 mm	8-10 kg
	mm	mm
275-400 mm	Min.250 mm	10 pcs/ctn

UP & UNDER FLAP SYSTEM



Material: Steel + Plastic
 Finish: Zinc Plated/Paint
 Features: Easy for installation

ST.6150

Create with topcent



mm	kg
600-900 mm	Max.5 kg
mm	mm
350-450 mm	Min.400 mm
	10 sets/ctn

SOFT CLOSING HINGE FOR FLAP DOOR



Material: Zinc alloy + Plastic
 Finish: Black
 Features: Silent System. Soft closing mechanism makes cabinet door closing quietly.

ST.3210

Create with topcent



mm	kg
-	A: 2-7kg B: 4-10kg
mm	mm
-	-
	10/5 sets/ctn

UP & TOP FLAP SYSTEM



Material: Steel + Plastic
 Finish: Zinc Plated/Black
 Features: Easy for installation

ST.6160

Create with topcent



mm	kg
500-700 mm 700-1200 mm 1200-1800 mm	2-4 kg 4-8 kg 8-12 kg
mm	mm
min.380 mm	Min.400 mm
	10 sets/ctn

FLAP DOOR FITTINGS

ELECTRIC FLAP STAY SYSTEM



Material: Zinc alloy + Steel + Plastic
 Finish: Grey
 Features: Power-driven and intelligence, operating smoothly.

ST.6520

Create with topcent



Max. 1200mm	2.25-5.25 kg 4.25-8.25 kg
450-580 mm	min. 300 mm
	5 sets/ctn

MANUAL TYPE



ELECTRIC TYPE



ROLLER SHUTTER DOOR(MANUAL TYPE)




Material: Aluminium
 Finish: Silver
 Features: Manual switch, Easy to Install

ST.5000

Create with topcent

Min. 450 mm	-	600-1600 mm	Min. 290 mm	1 sets/ctn

ROLLER SHUTTER DOOR(ELECTRIC TYPE)

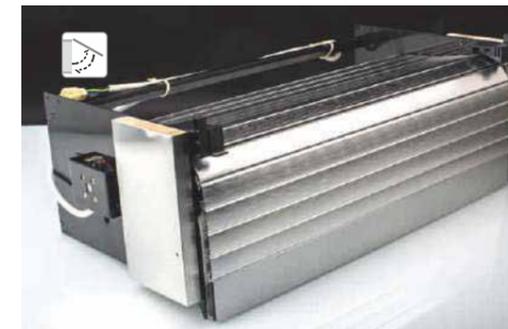


Material: Aluminum alloy
 Finish: Oxidation/Matt Satin/Copper Satin/Black/White
 Types: Electric type / Manual type
 Features: Silent system and excellent internal soft closing mechanism makes cabinet door close gently and quietly.

Electronic driver function



110v or 220v

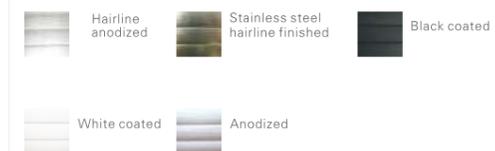

ST.6000

Create with topcent

Min. 450 mm	-	600-1600 mm	Min. 290 mm	1 sets/ctn

FLAP DOOR FITTINGS

LID STAY



Material: Steel
 Finish: Silver/Gold/Black/Grey
 Features: Any stay.Self Closing


ST.5120

Create with topcent



Max.800 mm	3-4 kg	
Min.200 mm	Min.100 mm	20 pcs/ctn

HYDRAULIC STAY

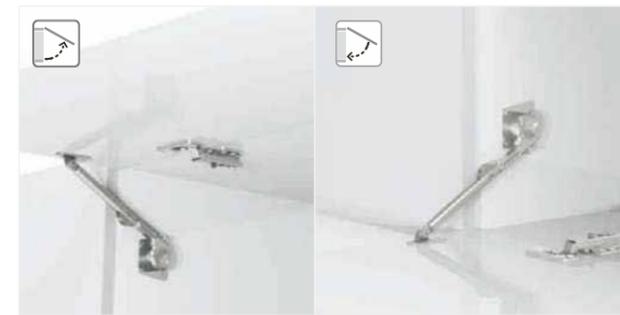

Material:Zinc alloy + Steel
 Finish: Nickel/Chrome
 Features: Adjustable weight capacity, convenient and practical, 180° free stop

ST.3110

Create with topcent



Max.600 mm	Max.3 kg	
300-450 mm	Min. 150 mm	100 pcs/ctn

HEAVY DUTY HYDRAULIC STAY



Material: Zinc alloy + Steel + Plastic
 Finish: Grey
 Features: Self-closing mechanism

ST.5110

Create with topcent



max.700 mm	max.6 kg	
300-600 mm	min. 200 mm	30 sets/ctn



Material:Zinc alloy + Steel + Plastic
 Finish: Nickel/Chrome
 Features: Silent System. Soft closing mechanism makes cabinet door close quietly.



ST.3120 Create with topcent	Long-arm		
ST.3160 Create with topcent	Short-arm		
ST.3140 Create with topcent	Long-arm		
ST.3180 Create with topcent	Short-arm		
300-450 mm	150 mm	600 mm	3 kg

FLAP DOOR FITTINGS


GAS SPRING



Material: Steel + Plastic
 Finish: Silver Grey / Gold / White / Black
 Features: International advanced spray-paint technology. Different gas spring can be ordered for different weight of door panel.

30N-300N 20N-100N 20N-150N 40N-120N	100 pcs/ctn

OPTIONAL LENGTH

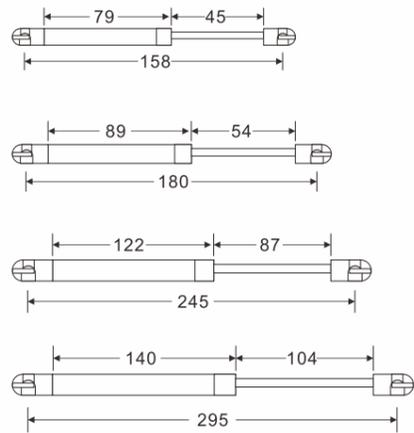

OPTIONAL COLOR



OPTIONAL CONNECTING PARTS



OPTIONAL SEAL RING



OPTIONAL COVER FOR GAS SPRING



To enhance anti-rusted and beautified effect

GAS SPRING



ST.2132
Create with topcent



ST.2134
Create with topcent



ST.2160
Create with topcent



ST.2145
Create with topcent

FLAP DOOR FITTINGS

LID STAY



Material: Zinc alloy
 Finish: Nickel
 Features: Free stops. 3 ways of opening to meet different needs. top opening, upward opening and down opening.



-	3-5 kg	300-500 mm	-	10/5 sets/ctn




DOUBLE OPEN SYSTEM




Material: Aluminum alloy + Steel + Plastic
 Finish: Grey
 Features: Self-closing mechanism




Max.200 mm	30 kg	25 mm
600/700 mm	Min.16 mm	5 sets/ctn

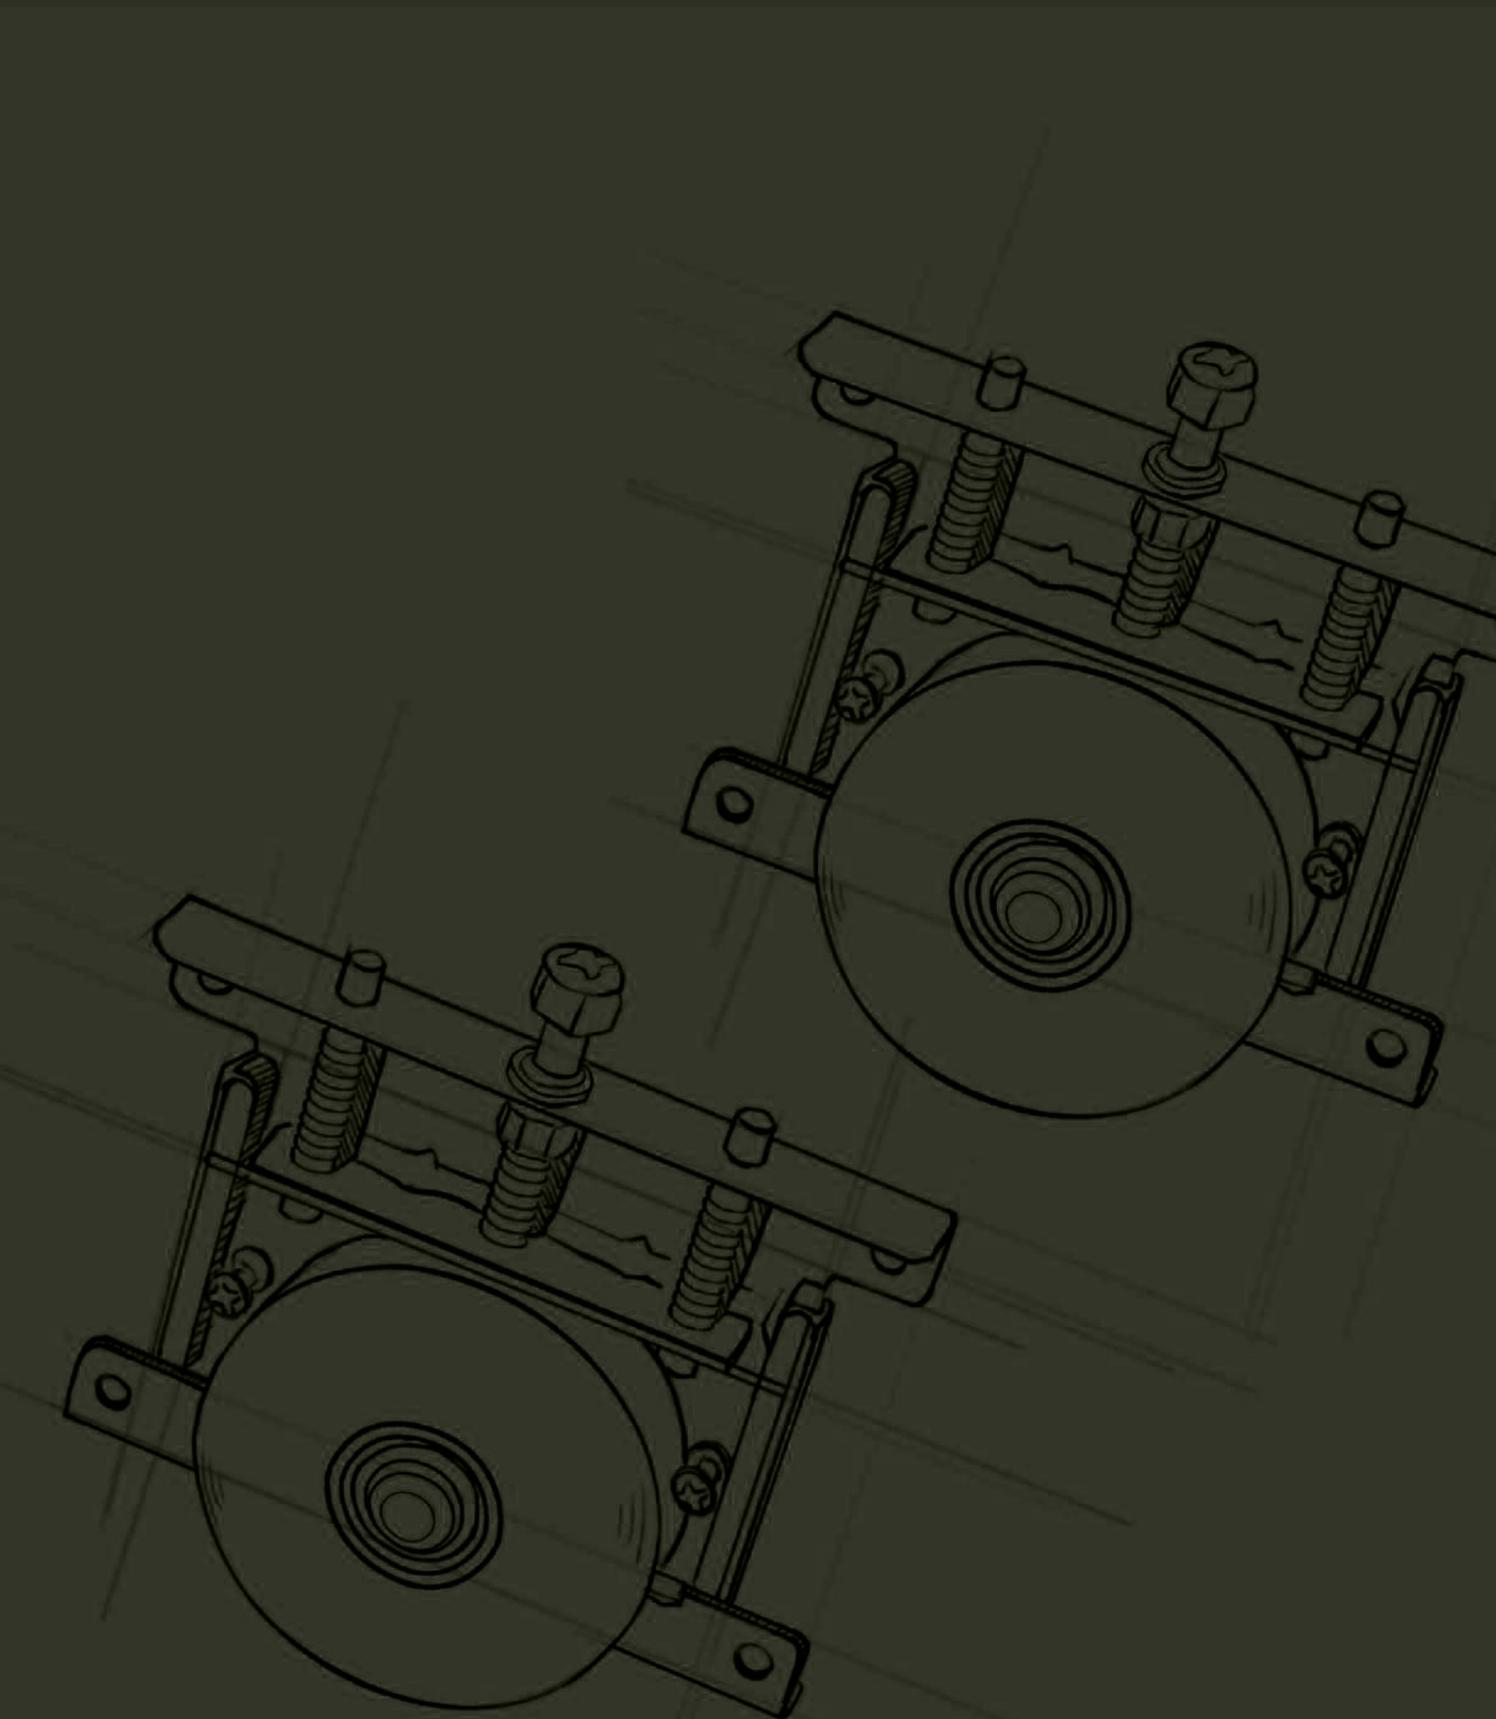

EMBEDDED SLIDING DOOR

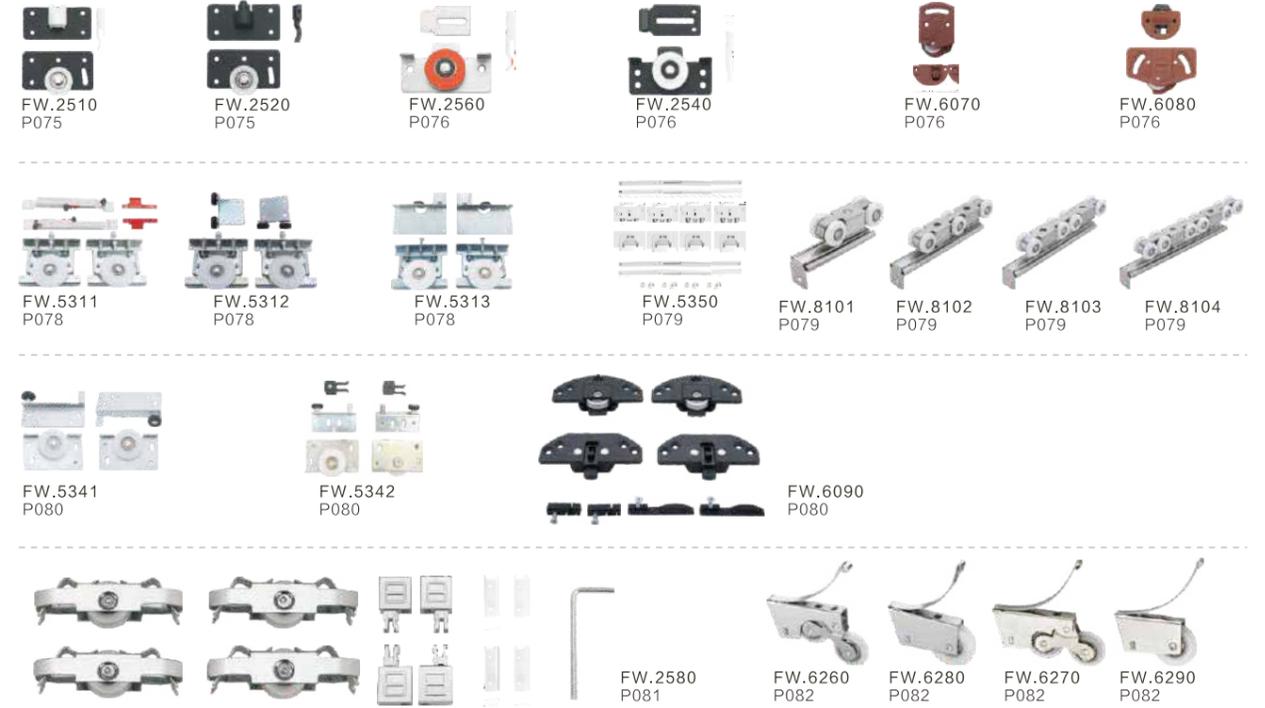

TRANSLATIONAL SLIDING DOOR

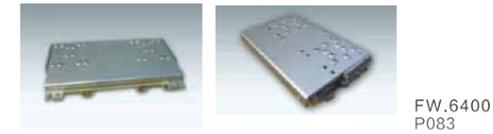

OVERLAY SLIDING DOOR



FOLDING SLIDING DOOR



DOORS STRAIGHTENER



Dimensional data not binding, We reserve the right to alter specifications without notice.

SLIDING DOOR FITTINGS




ROLLER FOR EMBEDDED SLIDING DOOR



Material: Steel + Nylon
Finish: Black + White
Door weight: 30 kg

120 sets/ctn




FW.2510
Create with topcent

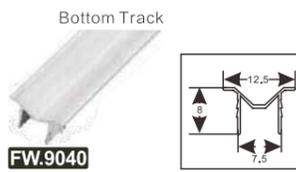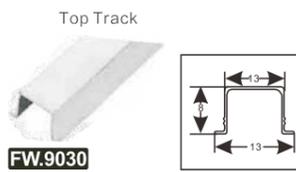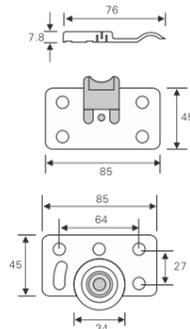

Material: Steel + Nylon
Finish: Black + White
Door weight: 30 kg



120 sets/ctn

FW.2520
Create with topcent

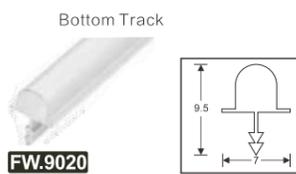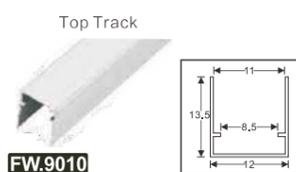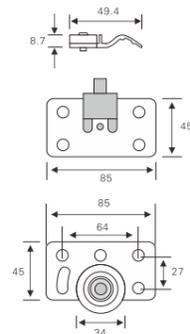


ROLLER FOR EMBEDDED SLIDING DOOR

FW.2560
Create with topcent

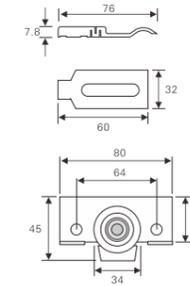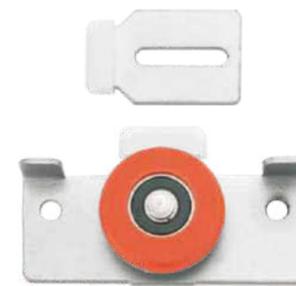


FW.2540
Create with topcent

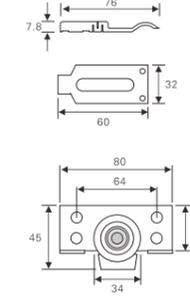


Material: Steel + Nylon
Finish: Silver + Orange/
Black + White
Door weight: 35 / 30 kg

200 sets/ctn


Top Track
Bottom Track

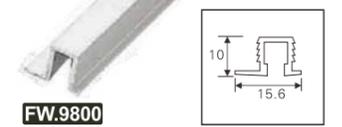

FW.6070
Create with topcent

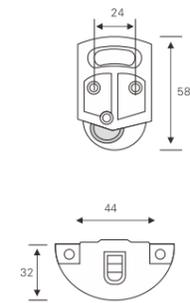


FW.6080
Create with topcent



Material: Plastic
Finish: Brown
Max. 15 kg


100 sets/ctn

Top Track
Bottom Track

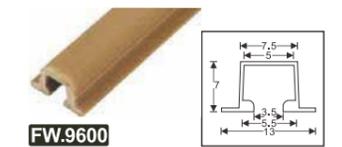


SLIDING DOOR FITTINGS

ROLLER FOR EMBEDDED SLIDING DOOR

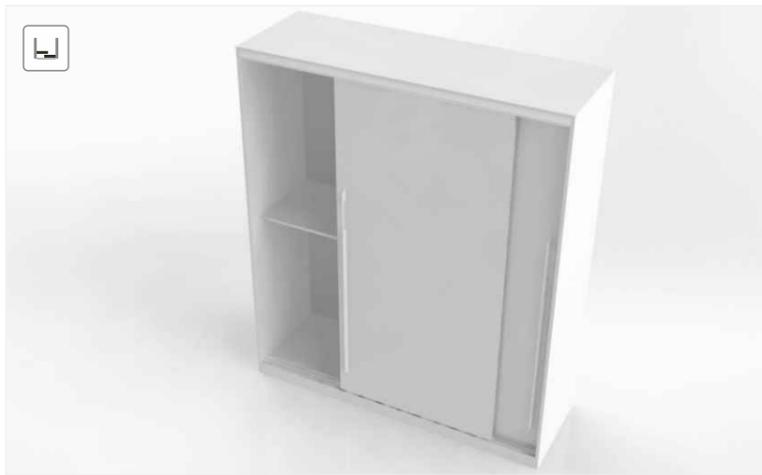


Material: Steel+Plastic
Finish: Zinc plated

50 sets/ctn


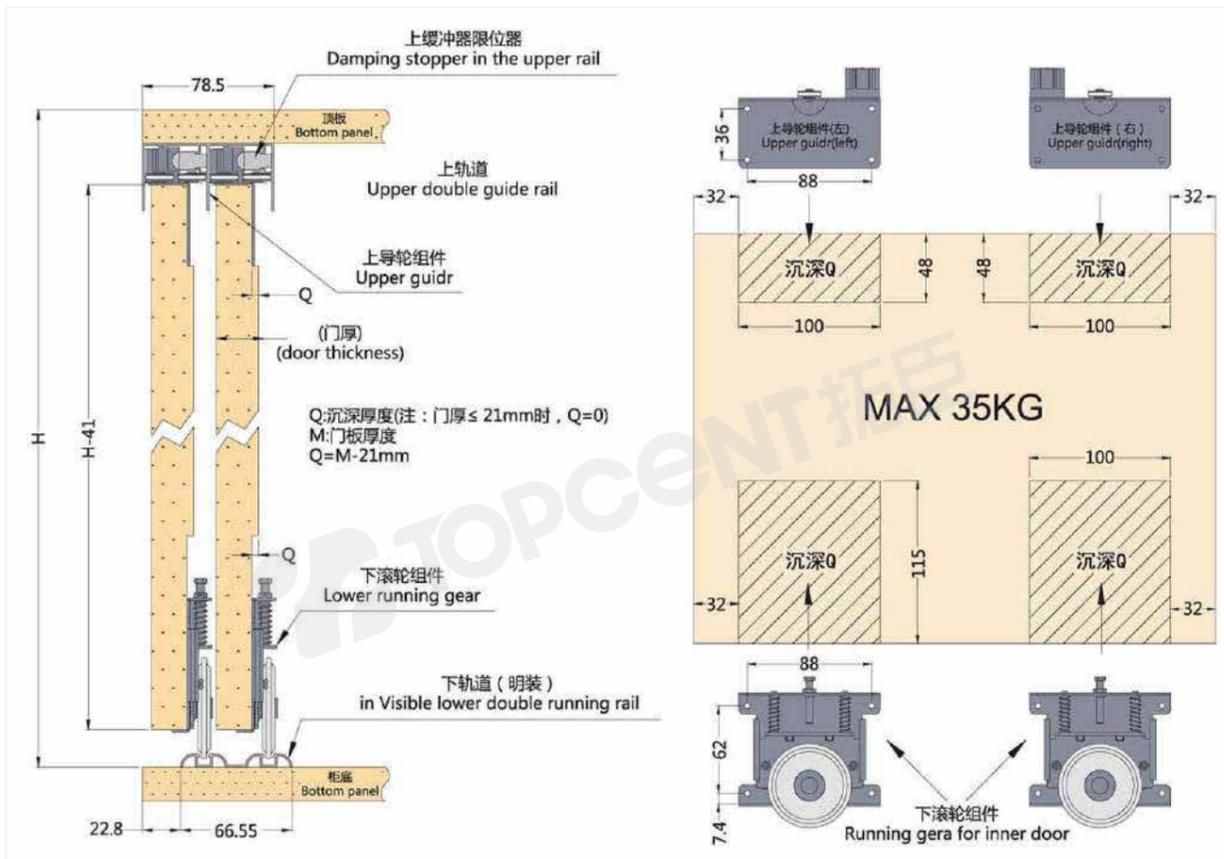


ROLLER FOR EMBEDDED SLIDING DOOR


FW.5311
Create with topcent

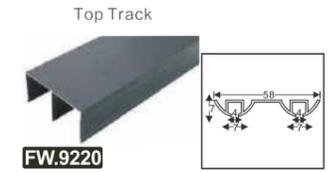

FW.5312
Create with topcent

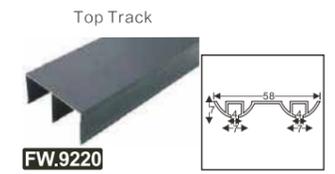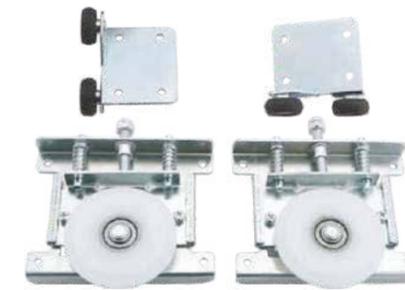


FW.5313
Create with topcent

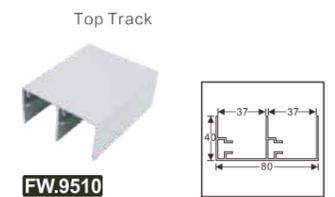

SLIDING DOOR FITTINGS


ROLLER FOR EMBEDDED SLIDING DOOR

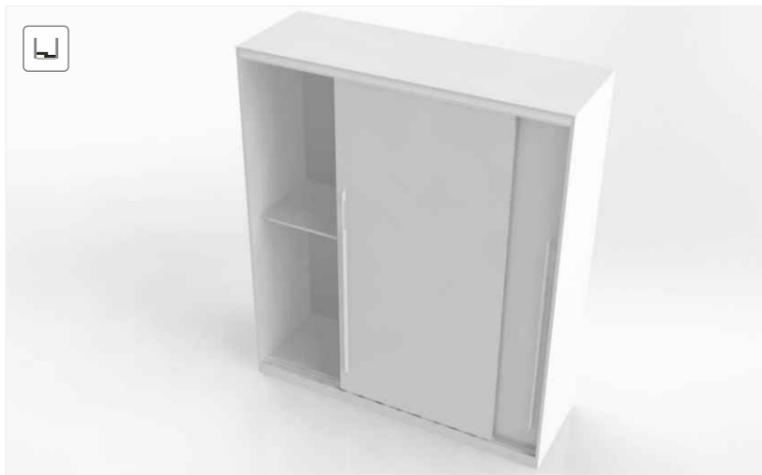

Material: Plastic
Finish: Black

30 sets/ctn

FW.5350
Create with topcent

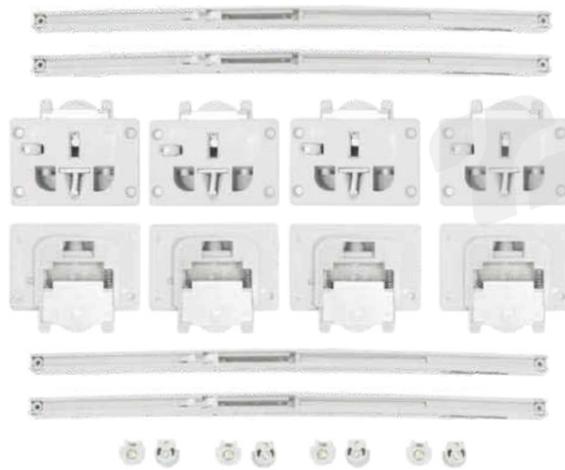

Top Track
Bottom Track

FW.9730


ROLLER FOR EMBEDDED SLIDING DOOR




FW.5341
Create with topcent

Material: Steel+Plastic
Finish: Zinc plated

50 sets/ctn

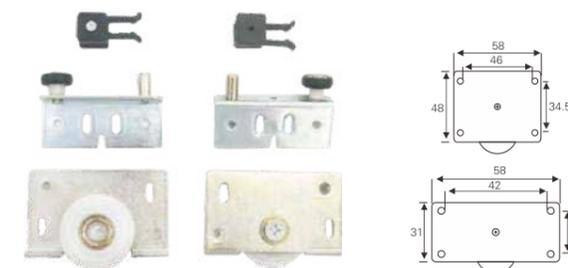

FW.5342
Create with topcent

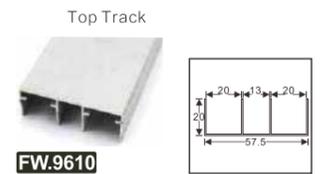

STAINLESS STEEL HANGING WHEEL SERIES

Material: Stainless Steel
Finish: Brushed Steel

40 sets/ctn




FW.8101
Create with topcent

FW.8102
Create with topcent

FW.8103
Create with topcent

FW.8104
Create with topcent

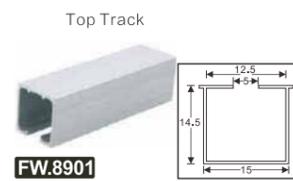

FW.6090
Create with topcent


Material: Steel+plastic
Finish: Black
Door weight: 20 kg
Features: Adjustable sliding door

60 sets/ctn






SLIDING DOOR FITTINGS

ROLLER FOR GLASS SLIDING DOOR

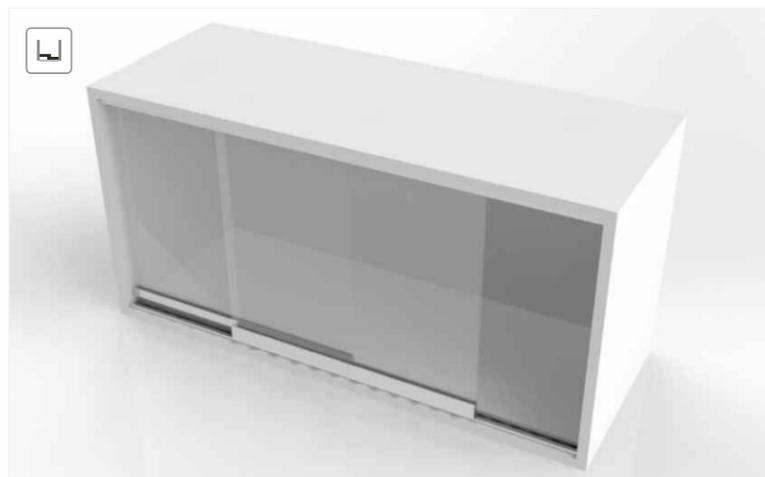

Material: Steel+Nylon
Finish: Nickel

300 sets/ctn

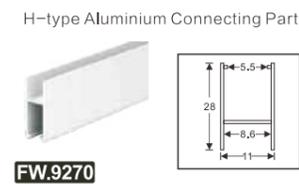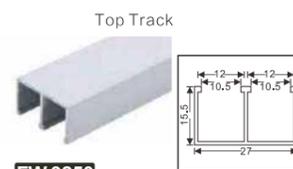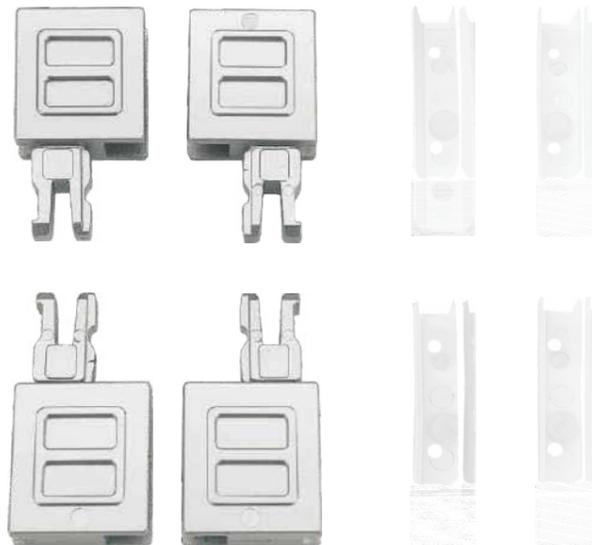

FW.2580
Create with topcent

ROLLER FOR ALUMINIUM FRAME



FW.6260
Create with topcent


FW.6280
Create with topcent

FW.6270
Create with topcent

FW.6290
Create with topcent

Material: Plastic + Steel
Finish: White / Ivory
Loading capacity: 110 kg/pair

100 sets/ctn

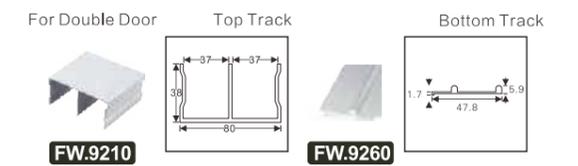

Material: Plastic + Steel
Finish: White / Ivory
Loading capacity: 110 kg/pair


100 sets/ctn



SLIDING DOOR FITTINGS

HEAVY-DUTY SLIDING DOOR FITTINGS

Material: Steel
Finish: Zinc plated

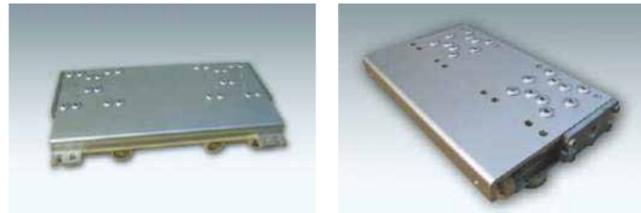


FW.6400
create with topcent



Standard products dimension

Door Thickness	20-30mm
Door Width	550-1200mm (please contact us for more information)
Door Height	less than 2500mm 2500mm以下
Door Weight	30-40kgs/per door (According to the width of the door) 30-40公斤/一門(根)



Item no.	Door Quantity	Door Width	Cabinet Width
FW.6400	2 Doors	550-750mm	1100-1500mm
		750-1000mm	1500-2000mm
		1000-1200mm	2000-2400mm
FW.6000	3 Doors	800-1000mm	2400-3000mm
		1000-1200mm	2700-3000mm
FW.6000	Running Track	Top & Bottom Track	-

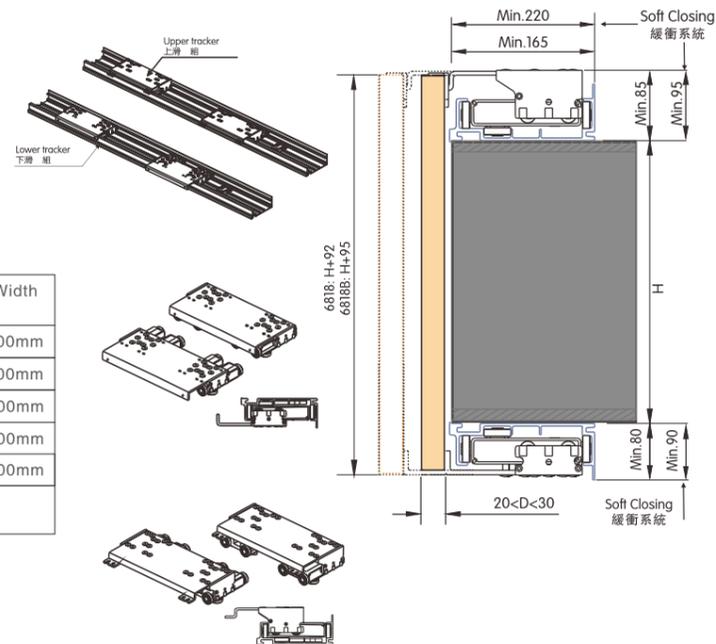

OPTIONAL TRACK

FW.6000
create with topcent


Material: Aluminum

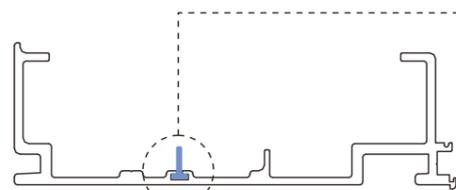

6818B

Flexible T aluminum profile
"T"

LIGHT DUTY ROLLER FOR OVERLAY SLIDING DOOR

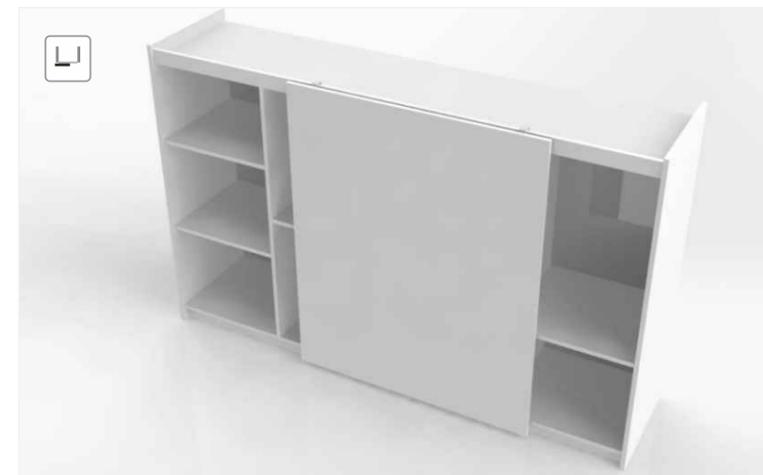

Material: Steel + Plastic
Finish: Zinc plated
Door Weight: 30kg

FW.5150
Create with topcent



FW.9570

LIGHT DUTY ROLLER FOR OVERLAY SLIDING DOOR

Material: Steel + Nylon
Finish: Zinc

FW.2550
Create with topcent



FW.9900

SLIDING DOOR FITTINGS

ROLLER FOR OVERLAY SLIDING DOOR




FW.5140
create with topoint


Material: Steel + Nylon
Finish: Zinc plated



Drilling Hole Drawing

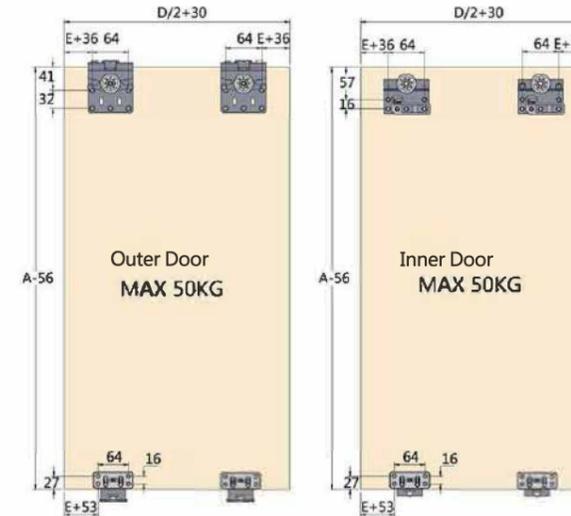

Section Side View

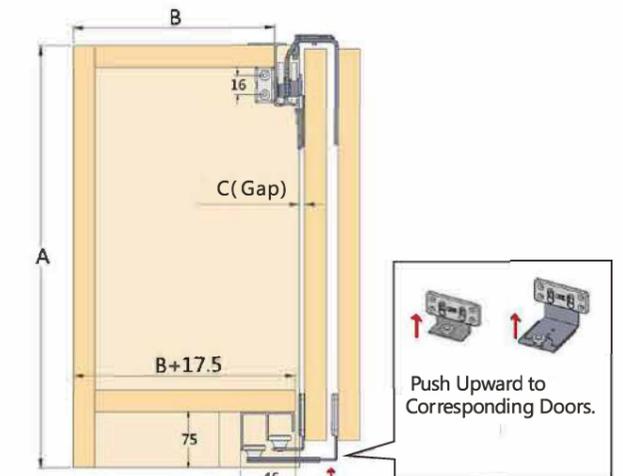

* Door thickness under 21mm, please choose 20MM type.
* Door thickness between 21mm-28mm, please choose 28MM type.
Please see details on Wardrobe Parameter Table.

Platform




Wardrobe Parameter Table

Thickness	C	F	G
20MM	3	B+23	B+51
	4	B+22	B+50
	5	B+21	B+49
28MM	3	B+23	B+58
	4	B+22	B+57
	5	B+21	B+56

Accessory Parameter Table


Accessory	Installation	
	For 2 Doors (1 outer 1 inner)	For 3 Doors (1 outer 2 inner)
A1 Outer Upper Roller	2PCS	2PCS
A2 Outer Lower Guide Roller	2PCS	2PCS
B1/B2 Inner Upper Roller	1PCS/1PCS	2PCS/2PCS
B3 Inner Lower Guide Roller	2PCS	4PCS
FW.9560	1PCS	1PCS
FW.9550	1PCS	1PCS
①	2PCS	2PCS
②	2PCS	2PCS
③	2PCS	2PCS
④	2PCS	2PCS
⑤	1PCS	1PCS
⑥	—	1PCS
⑦	1PCS	2PCS
⑧	2PCS	2PCS

Anti-collision damper is only used for the place locating pins of inner & outer door meet.



Install Parts ⑤


After Installed, Rotate to the Highest Point to Prevent it from Falling Off



Install Parts ③

Open Inner Door Thread-off Proof Device

After Installed, According to the Direction of Arrow to Push to the Limited Point




Install 3-Door Locator

Open Outer Door Thread-off Proof Device

This Locator is only used for Three Doors.

Sliding Door of Installing L-Shaped Aluminum Handle

If you install L-Shaped Aluminum handle, square iron sheet (thickness=H) are required for both upper & lower roller.

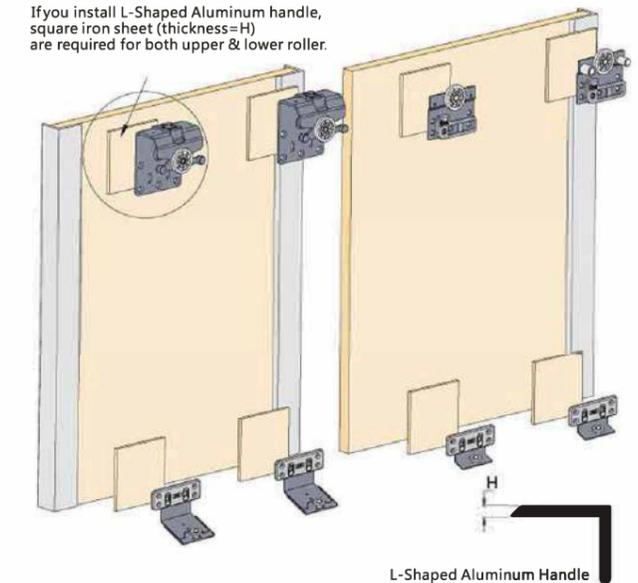


/Optional track




FW.9550

Bottom Track



FW.9560

Top Track



20 sets/ctn

SLIDING DOOR FITTINGS

HEAVY DUTY VISIBLE SLIDING DOOR FITTINGS




FW.5240
create with topcent


Material: Steel + Nylon
Finish: Zinc plated





Drilling Drawing

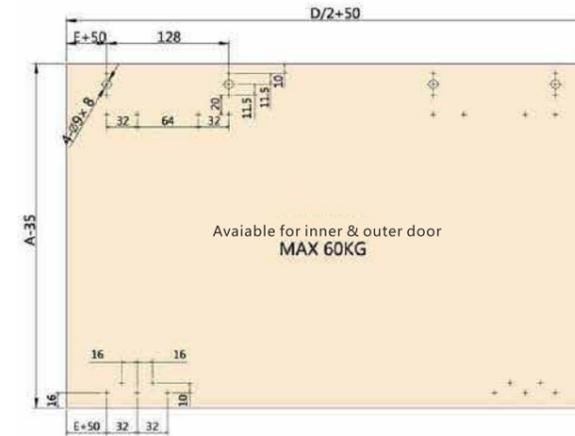


Two-Door Installation Drawing

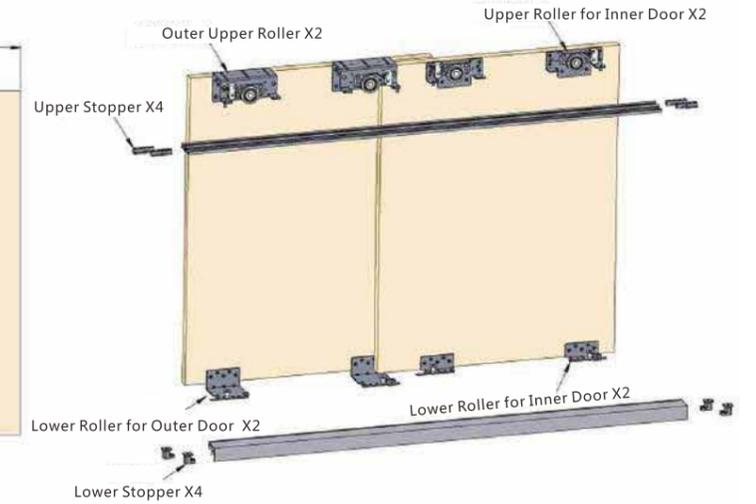


Side View

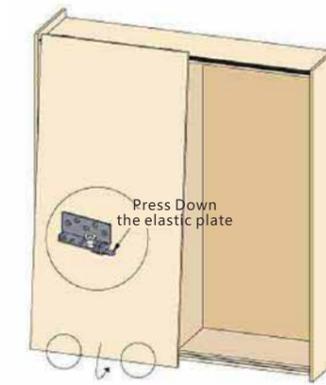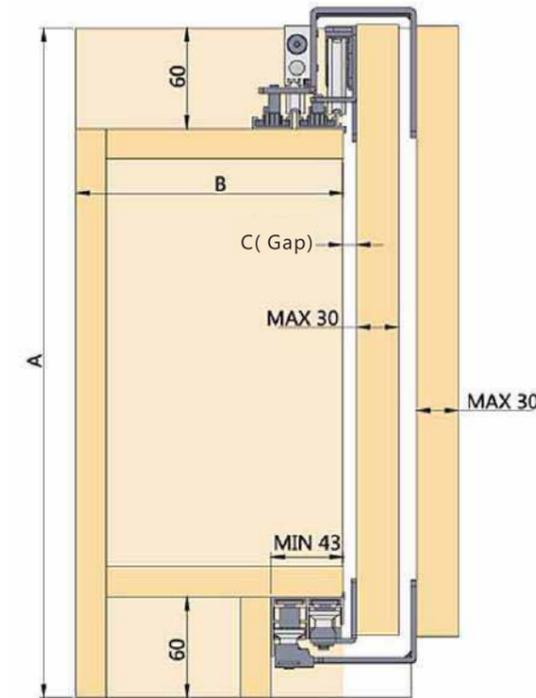

Inner Door Installation

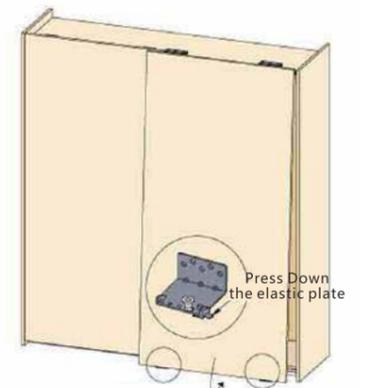


Outer Door Installation

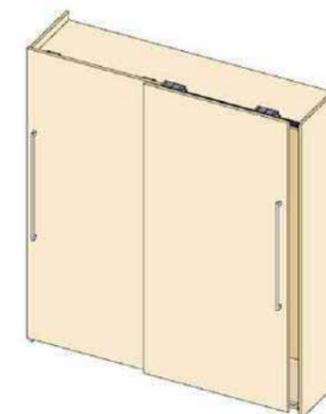

To Adjust the height of Outer Door

To Adjust the height of Inner Door

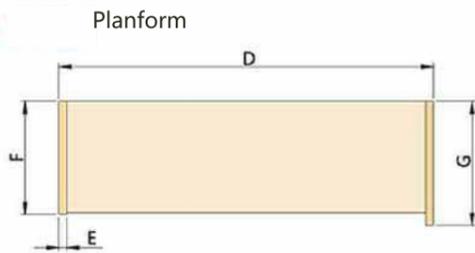


Wardrobe Parameter Table

C	F	G
3	B+5.5	B+40.5
4	B+4.5	B+39.5
5	B+3.5	B+38.5


Accessory Parameter Table

Accessory	Installation		
	For 2 Doors (1 outer 1 inner)	For 3 Doors (1 outer 2 inner)	For 3 Doors (2 outer 1 inner)
A1/A2 Outer Upper Roller	1PCS/1PCS	1PCS/1PCS	2PCS/2PCS
A3/A4 Outer Lower Guide Roller	1PCS/1PCS	1PCS/1PCS	2PCS/2PCS
B1/B2 Inner Upper Roller	1PCS/1PCS	2PCS/2PCS	1PCS/1PCS
B3 Inner Lower Guide Roller	1PCS/1PCS	2PCS/2PCS	1PCS/1PCS
FW.9530	1PCS	1PCS	1PCS
C3	4PCS	6PCS	6PCS
FW.9540	1PCS	1PCS	1PCS
C4	4PCS	6PCS	6PCS

/Optional track

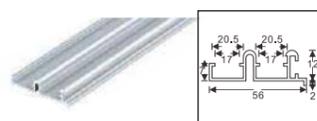

FW.9530 Upper Track

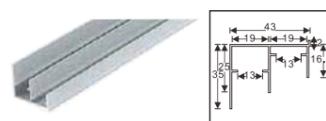

FW.9540 Lower Track

8 sets/ctn

SLIDING DOOR FITTINGS

HEAVY DUTY FOLDING SLIDING DOOR FITTINGS






FW.7220
 Create with topcent

Material: Steel + Nylon
 Finish: Zinc plated




Accessory Parameter Table


Installation	Accessory	Quantity
4 Doors	Top Roller	2
	Bottom Guide Roller	2
	hinge	8
	Drilling Mould	1

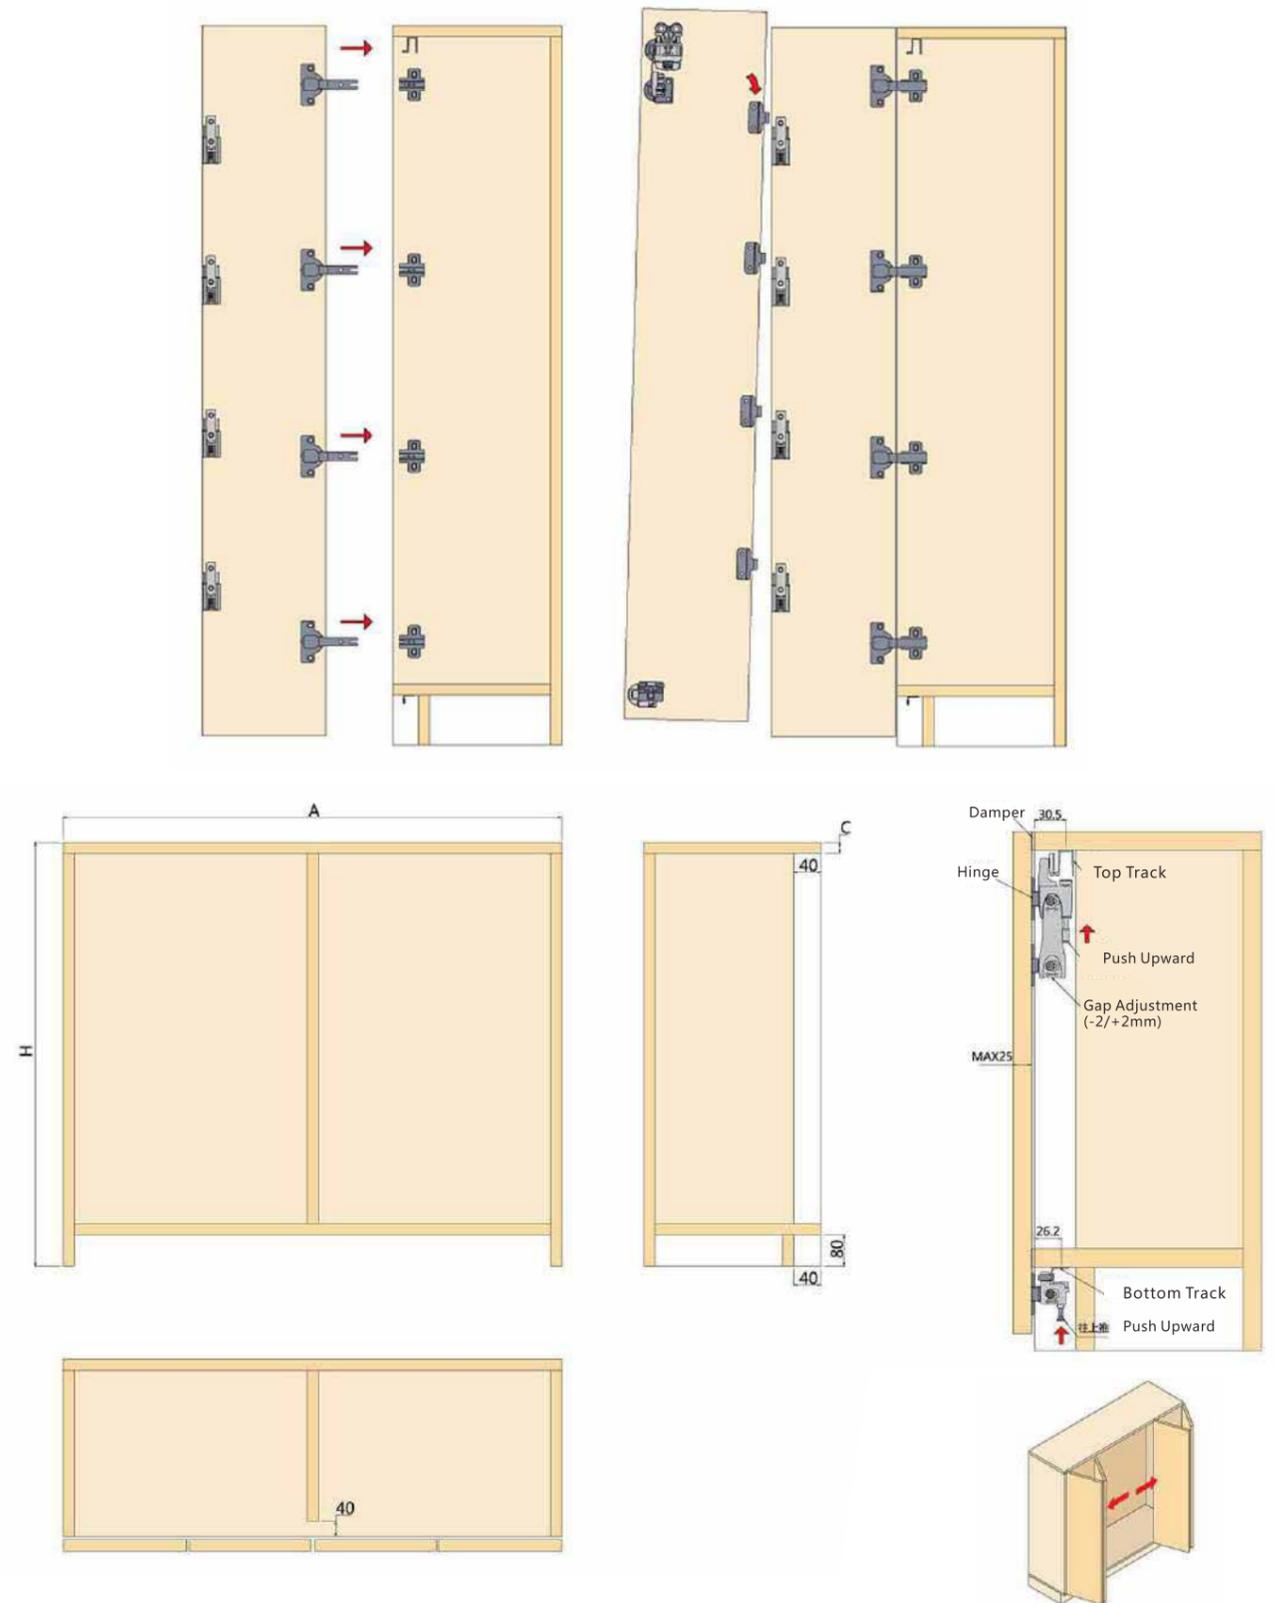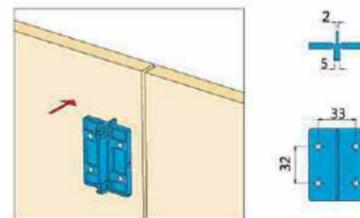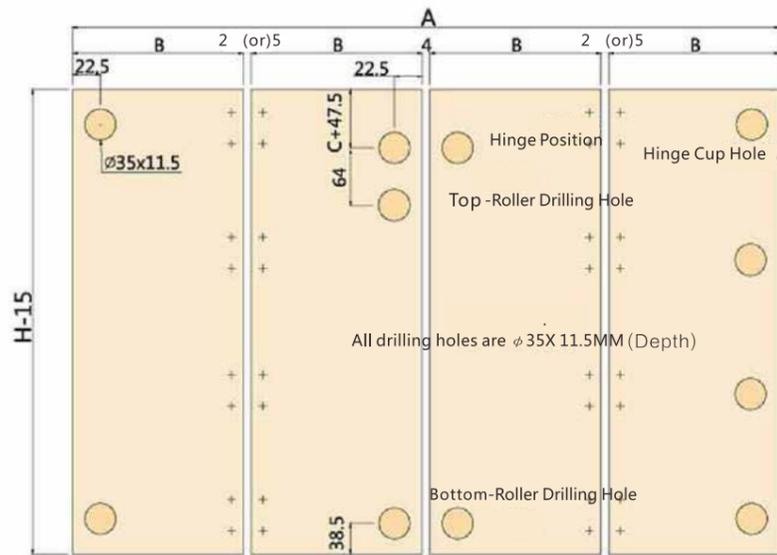

Optional track

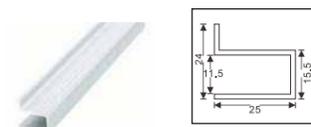

FW.9710 Top Track

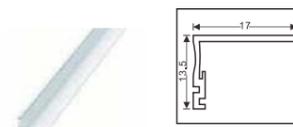

FW.9720 Bottom Track

1 set/box 20 boxes/ctn

SLIDING DOOR FITTINGS

LIGHT DUTY FOLDING SLIDING DOORS FITTINGS





FW.7120
create with topcent

Material: Steel + Plastic
Finish: Nickel



Accessory Parameter Table

Installation	4 Doors
Top Roller	2
Bottom Guide Roller	2
Hinge	8
Drilling Mould	1

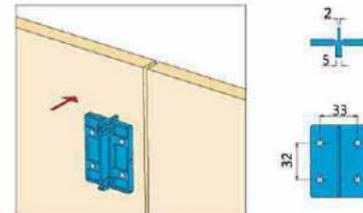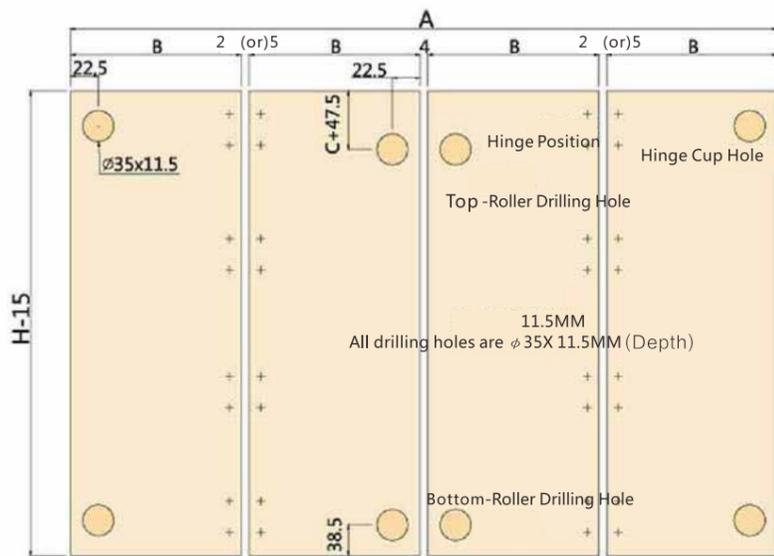


Optional track




FW.9710

Top Track



FW.9720

Lower Track



1 set/box 20 boxes/ctn

DOOR STRAIGHTENER



FW.5320
Create with topcent

FW.5321
Create with topcent

50 pcs/ctn

Material: Steel + Plastic/Zinc alloy + Plastic
Finish: Black + White
Features: It can well prevent doors from bending or deforming.



FW.5322
Create with topcent

30 pcs/ctn

Material: Aluminium+Iron
Finish: Golden/Black
Features: It can well prevent doors from bending or deforming.

REYON